

STARLITER  
GLST703S2

LUMINAIRE REF:

PROJECT REF:




COPPER

OUTDOOR 180MM PENDANT WITH 360° TWINKLING EFFECT

The Starliter is a tubular pendant that is perforated to create a soft twinkling effect. It is ideally hung in a tree or shrub so it can freely move in the breeze. Individually supplied with a 1 metre chain, these fittings can be suspended from trees or pergolas. They look best when hung in a group of three differing sizes.

This range of hanging tree lights creates the best effects and is an excellent addition to your outdoor lighting ideas. Independently tested by the LIA.



ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML



IP68 IN-LINE  
CONNECTION  
ACILIP68C



IP68 Y-JUNCTION  
CONNECTION  
ACYJBIP68



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




STARLITER

GLST703S2

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	N/A
BEAM ANGLE (°)	N/A
LED SOURCE LUMENS (LM)	72 lm
LUMINAIRE LUMENS (LM)	10.1 lm
INTENSITY RATING (CD)	N/A
POWER CONSUMPTION (W)	1W
LUMINAIRE EFFICACY (LM/W)	10.1 lm/W
DRIVE CURRENT (mA)	350mA
FORWARD VOLTAGE (V DC)	2.8V DC


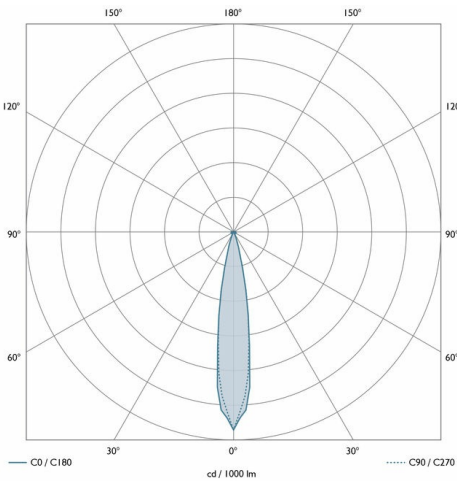


INGRESS RATING	IP65
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1:2015

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>90 Ra
IES TM-30 COLOUR FIDELITY (Rf)	80
IES TM-30 COLOUR GAMUT (Rg)	>95
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	3000mm
CONNECTOR TYPE	N/A
WEIGHT	440g
FIRE RATED	N/A

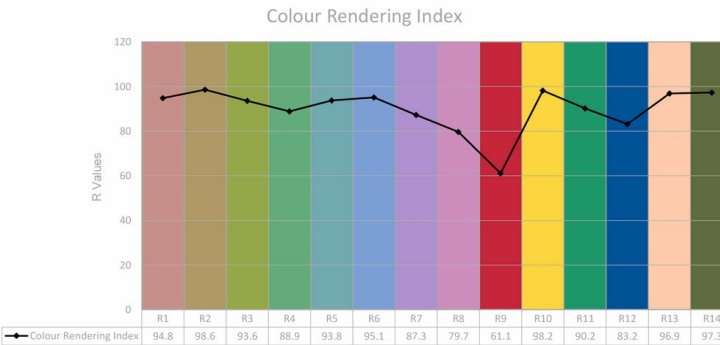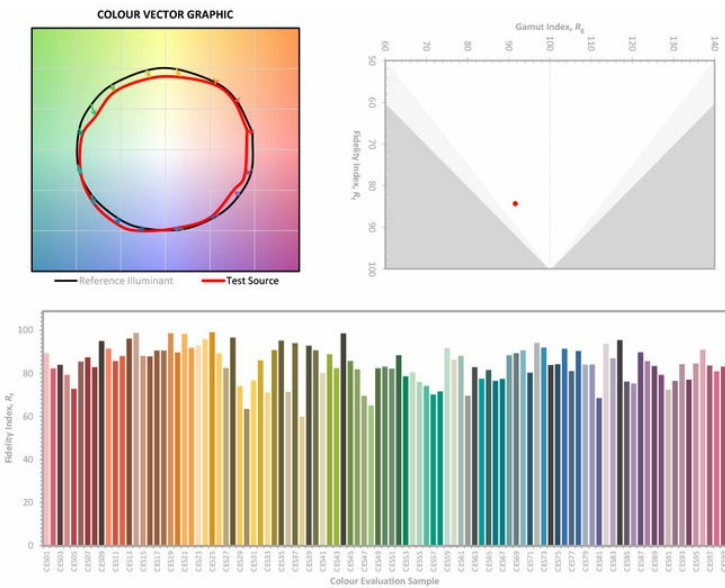

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

