

## CARELLA GLCA27061

LUMINAIRE REF:


PROJECT REF:



## DECORATIVE BRONZE 360 ° CANDLE EFFECT SPIKE LIGHT

The Carella, a decorative outdoor garden candle light, is ideal for use in the garden and produces a 360 atmospheric light whilst being used to discreetly light foliage and low level planting whilst creating a glowing candle effect.

The Carella outdoor garden candle light looks great when placed in groups, for example a cluster of three in an area of planting. It also looks wonderful along a path to light your way and is a versatile fitting being suitable for modern contemporary town houses as well as traditional country houses. Independently tested by the LIA.





360

## **ACCESSORIES**



IP66 ENCLOSURE FOR DRIVER LARGE ACENIPLRG



IP66 ENCLOSURE FOR DRIVER SMALL ACENIPSML



IP68 IN-LINE CONNECTION ACILIP68C



IP68 Y-JUNCTION CONNECTION ACYJBIP68



WWW.JOHNCULLENLIGHTING.COM

 $\mathsf{UK} + 44 \ (0) \ 20 \ 7371 \ 9000 \ | \ \mathsf{Middle} \ \mathsf{East} \ \& \ \mathsf{APAC} + 971 \ (0) \ 4 \ 321 \ 114 \ | \ \mathsf{Europe} \ + 33 \ (0) 9 \ 61 \ 68 \ 22 \ 81 \ | \ \mathsf{APAC} + 971 \ (0) \ \mathsf{APAC} + 971 \ \mathsf{APA$ 










## CARELLA GLCA27061

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	360
BEAM ANGLE (°)	360°
LED SOURCE LUMENS (LM)	72 lm
LUMINAIRE LUMENS (LM)	24.3 lm
INTENSITY RATING (CD)	N/A
POWER CONSUMPTION (W)	1W
LUMINAIRE EFFICACY (LM/W)	24.3 lm/W
DRIVE CURRENT (mA)	350mA
FORWARD VOLTAGE (V DC)	2.8V DC





INGRESS RATING	IP65
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-7:1997


COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>90 Ra
IES TM-30 COLOUR FIDELITY (Rf)	N/A
IES TM-30 COLOUR GAMUT (Rg)	>95
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 +40 °C


ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	5000mm
CONNECTOR TYPE	N/A
WEIGHT	240g
FIRE RATED	N/A





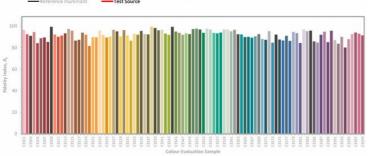

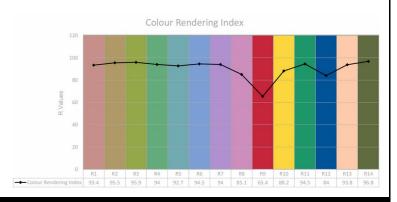

WWW.JOHNCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81







