

GUIDA
LOW PROFILE INDICATOR LIGHT - SINGLE/DOUBLE FACET

LUMINAIRE REF:

PROJECT REF:

The Guida is an exterior in-ground LED indicator light producing a low glare light across the ground. It is ideal for multiple uses including exterior landscaping and marine applications by lighting the edge of pathways, steps or decking.



This indicator light is available in a single or double facet depending in which direction you want the light to be angled.




NAVAL BRASS



STAINLESS STEEL

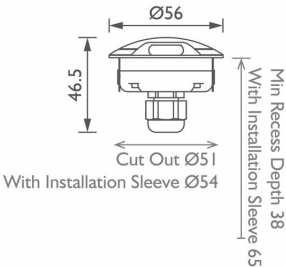

FLOOR WASH



DOUBLE FLOORWASH

ACCESSORIES



IP66 ENCLOSURE
FOR DRIVER
LARGE
ACENIPLRG



IP66 ENCLOSURE
FOR DRIVER
SMALL
ACENIPSML



IP68 IN-LINE
CONNECTION
ACILIP68C



INSTALLATION
SLEEVE
ACISGUID1



IP68 Y-JUNCTION
CONNECTION
ACYJBIP68



WWW.JOHNCCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




GUIDA

LOW PROFILE INDICATOR LIGHT - SINGLE/DOUBLE FACET

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	FLOOR WASH	DOUBLE FLOORWASH
BEAM ANGLE (°)	68° x 21°	71° x 47.5°
LED SOURCE LUMENS (LM)	90 lm	90 lm
LUMINAIRE LUMENS (LM)	10 lm	20 lm
INTENSITY RATING (CD)	16	32
POWER CONSUMPTION (W)	1W	1W
LUMINAIRE EFFICACY (LM/W)	10 lm/W	20 lm/W
DRIVE CURRENT (mA)	350mA	350mA
FORWARD VOLTAGE (V DC)	2.7	2.7


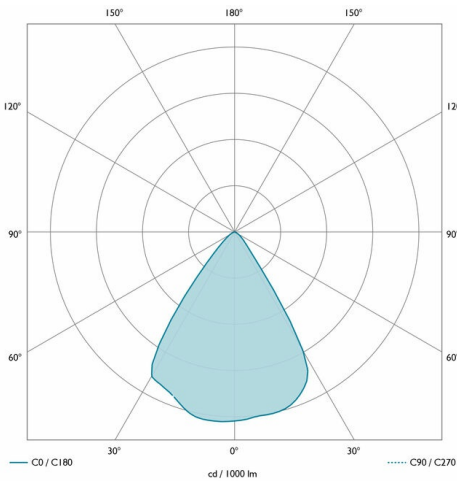


INGRESS RATING	IP67
IMPACT RATING	IK20
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012
	IEC/EN 60598-2-13:2006

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	94.9
IES TM-30 COLOUR GAMUT (Rg)	98.7
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Switched

OTHER DATA	
Cable Type	2 Core Silicone (180 °C)
Cable Size	6.4mm OD - 2 off 24/0.2 (0.75mm2)
Cable Length	5000mm
Connector Type	N/A
Weight	2200g
Fire rated	N/A

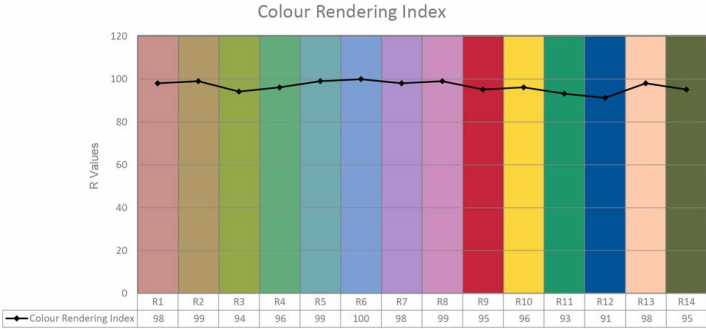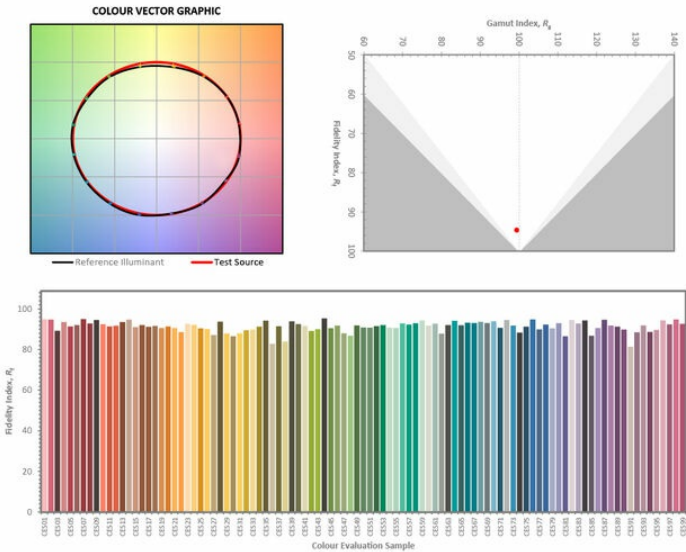

WWW.JOHN CULLEN LIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

