

CONTOUR EDGE 100 BLACK ANODISED
LLCEXU161

LUMINAIRE REF:

PROJECT REF:





BLACK ANODISED

1000MM IN-GROUND LOW GLARE WALL GRAZER

The Contour Edge is an in-ground wall grazer delivering the highest quality of light with the lowest glare in the most discreet housing possible. It comes in 4 sizes - 250mm, 500mm, 750mm and 1000mm, which can be easily paired together to create a longer run ensuring a continuous graze.

It is ideal as both an interior or exterior wall grazer when you require uniform light up a wall. If using inside, the warranty increases to 5 years.



ELLIPTICAL

ACCESSORIES



CONTOUR EDGE
INSTALLATION
SLEEVE
CONNECTOR
ACCECNCTR1



CONTOUR EDGE
100 CONCRETE
CAN
ACLCE10CC1



SINGLE CONTOUR
EDGE 100
INSTALLATION
SLEEVE
ACLCE10IS1



COMBINABLE
CONTOUR EDGE
100 INSTALLATION
SLEEVE
ACLCE10IS2



SINGLE CONTOUR
EDGE 50
CONCRETE CAN
ACLCE50CC1



COMBINABLE
CONTOUR EDGE
50 INSTALLATION
SLEEVE
ACLCE50IS2



SINGLE CONTOUR
EDGE 75
CONCRETE CAN
ACLCE75CC1



CONTOUR EDGE
75 INSTALLATION
SLEEVE
ACLCE75IS1



COMBINABLE
CONTOUR EDGE
75 INSTALLATION
SLEEVE
ACLCE75IS2



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




CONTOUR EDGE 100 BLACK ANODISED
LLCEXU161

LUMINAIRE REF:

PROJECT REF:

| SPECIFICATION | ELLIPTICAL |
|---------------------------|------------|
| BEAM ANGLE (°) | 35° + 15° |
| LED SOURCE LUMENS (LM) | 2244 lm |
| LUMINAIRE LUMENS (LM) | 796 lm |
| INTENSITY RATING (CD) | 2880 |
| POWER CONSUMPTION (W) | 24W |
| LUMINAIRE EFFICACY (LM/W) | 33 lm/W |
| DRIVE CURRENT (mA) | 700mA |
| FORWARD VOLTAGE (V DC) | 38V DC |
| | |
| | |
| | |


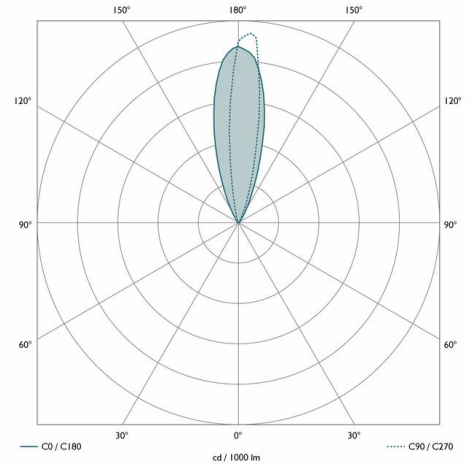


| | |
|----------------|------------------------|
| INGRESS RATING | IP67 |
| IMPACT RATING | IK08 |
| COMPLIANCE | IEC/EN 60598-1:2015 |
| | IEC/EN 60598-2-2:2012 |
| | IEC/EN 60598-2-13:2006 |

| | |
|--------------------------------|---------------------|
| COLOUR TEMPERATURE | 2700K |
| CIE CRI AVAILABLE AS | 98 Ra |
| IES TM-30 COLOUR FIDELITY (Rf) | >90 |
| IES TM-30 COLOUR GAMUT (Rg) | >90 |
| BINNING | 2 SDCM (Equivalent) |
| LIFETIME L70/B10 (HOURS) | >50000 |
| AMBIENT TEMPERATURE (Ta) | -20 ... +40 °C |

| ELECTRICAL | |
|------------------|------------------------------------|
| SOURCE TYPE | LED |
| PRODUCT CLASS | Class III (SELV low voltage) |
| DIMMING PROTOCOL | 1-10V dimmable |
| | DALI dimmable |
| | Mains dimmable (phase cut dimming) |
| | Switched |

| OTHER DATA | |
|----------------|------------------------------------|
| CABLE TYPE | 2 Core Silicone (180°C) |
| CABLE SIZE | 2 off 7/0.2 (0.22mm ²) |
| CABLE LENGTH | 2000 mm |
| CONNECTOR TYPE | N/A |
| WEIGHT | N/A |
| FIRE RATED | N/A |

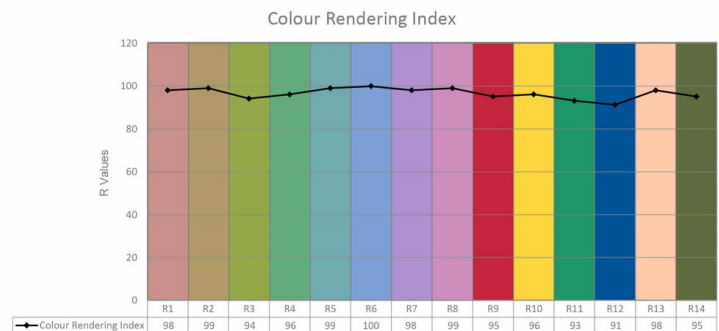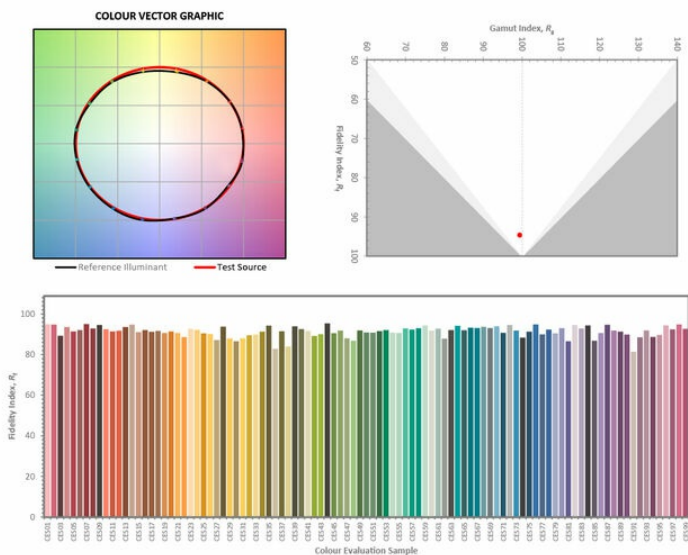

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

