

POLESPRING PURE 30 SHELF LIGHT WHITE
MEDIUM
KPS30SL27ME9005

LUMINAIRE REF:

PROJECT REF:





WHITE RAL 9003 TEXTURED

WHITE MEDIUM DIRECTIONAL 2700K MICRO SHELF LIGHT

The Polespring 30 Shelf Light is a low glare miniature directional architectural downlight suitable for using in joinery. It has a tilt mechanism of 30 degrees and is suitable for both interior and marine applications. An extra deep black baffle and extra slim steel bezel allows for a low glare and minimal architectural lighting solutions. Ideal for lighting through glass shelving or to light individual shelves.

This product has been designed especially for shelf lighting with a trapezoidal spring for easy installation.

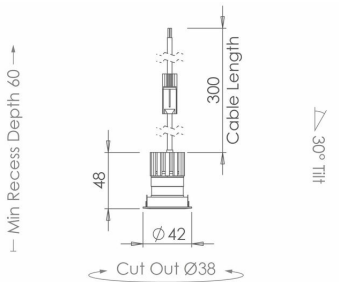

MEDIUM

ACCESSORIES



HONEYCOMB
INSERT 23MM
ACHC23MM1



SPREADER LENS
23MM
ACLL23MM1



SANDBLASTED
GLASS LENS 23MM
ACSG23MM1



SOFTENING LENS
23MM
ACSL23MM1




POLESPRING PURE 30 SHELF LIGHT WHITE
MEDIUM

KPS30SL27ME9005

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	MEDIUM
BEAM ANGLE (°)	32°
LED SOURCE LUMENS (LM)	400
LUMINAIRE LUMENS (LM)	280
INTENSITY RATING (CD)	830
POWER CONSUMPTION (W)	3.9
LUMINAIRE EFFICACY (LM/W)	72
DRIVE CURRENT (mA)	350mA
FORWARD VOLTAGE (V DC)	11V DC

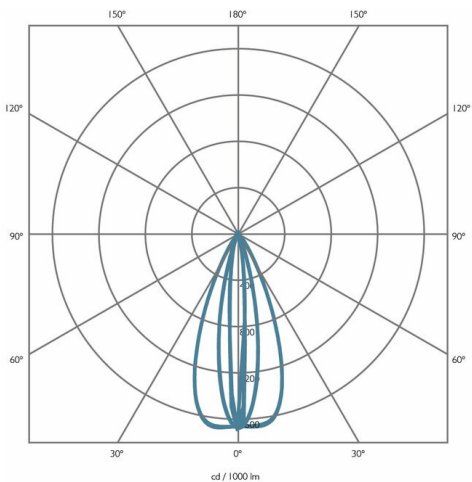

INGRESS RATING	IP20
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1
	IEC/EN 60598-2-2

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>90 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	>90
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
Cable Type	2 Core Silicone (105°C)
Cable Size	4.1mm OD - 2 off 17/0.15
Cable Length	300mm
Connector Type	OJ-602B
Weight	N/A
Fire rated	Yes

