

## CONTOUR 9.6W IP LED STRIP

PROJECT REF \_\_\_\_\_


9.6W IP RATED LED STRIP FOR USE IN WET AREAS

The Contour products are used to provide detail lighting. Often to highlight features of joinery, stair treads or illuminate shelving where you require something to be illuminated instead of providing a light source.

Contour strips can be cut every 33.3mm and are sold by the metre.

## LUMINAIRE DATA

Beam Angle	
LED Source Lumens	
Luminaire Lumens	
Intensity Rating	
Power Consumption	
Luminaire Efficacy	
Colour Temperature	2400K, 2700K
CIE CRI available as	98 Ra
IES TM-30 Colour Fidelity ( $R_f$ )	
IES TM-30 Colour Gamut ( $R_g$ )	
Binning	2 SDCM
Lifetime L70/B10 (hours)	>50000
IP Rating	IP65
IK Rating	IK06

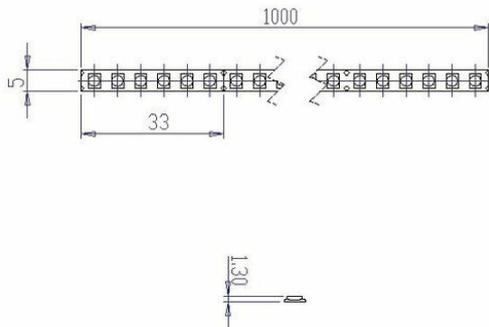

Dimensions in mm. Not to scale

Polar diagram

## PRODUCT VARIATIONS

2400K	DALI dimmable
2700K	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

Technical data figures are for guidance only and are subject to  $\pm 5\%$  tolerance

## CONTOUR 9.6W IP LED STRIP

9.6W IP RATED LED STRIP FOR USE IN WET AREAS

ELECTRICAL INFORMATION	NORMAL	MAX
Forward Voltage (Vf) @ 85°C	24	
Current Rating	400mA	
Wattage	9.6W	
Source Type	LED	
Product Class	Class III (SELV low voltage)	

## PHYSICAL DATA

Cable Size	20AWG
Cable Type	Single Insulated PVC
Cable Length	0.25m
Connector Type	
Weight	
Ambient Temperature (Ta) (in void)	100kg p/5m reel

Technical data figures are for guidance only and are subject to ±5% tolerance

## PROJECT REF \_\_\_\_\_

## PRODUCT ACCESSORIES

Contour Standard Surface Mount Aluminium Profile 1m	LIFLMKPRO004AP1M
Contour Standard Surface Mount Aluminium Profile 2m	LIFLMKPRO004AP2M
Contour Curved Corner Aluminium Profile 1m	LIFLMKPRO006AP1M
Contour Curved Corner Aluminium Profile 2m	LIFLMKPRO006AP2M

## COMPLIANCE

