

CONTOUR HDX24 LED STRIP


EXTRA WARM WHITE LED STRIP FOR USE IN WET AREAS

The Contour products are used to provide detail lighting. Often to highlight features of joinery, stair treads or illuminate shelving where you require something to be illuminated instead of providing a light source.

Contour strips can be cut every 50mm and are sold by the metre.

LUMINAIRE DATA	NARROW	MEDIUM	WIDE
Beam Angle	120°	120°	120°
LED Source Lumens	750 lm/m		
Luminaire Lumens	750 lm/m		
Intensity Rating			
Power Consumption	9W		
Luminaire Efficacy	90 lm/W		
Colour Temperature	2400K		
CIE CRI available as	>90 Ra		
IES TM-30 Colour Fidelity (R _f)	90		
IES TM-30 Colour Gamut (R _g)	>96		
Binning	2 SDCM		
Lifetime L70/B10 (hours)	>50000		
IP Rating	IP68		
IK Rating			

PROJECT REF _____

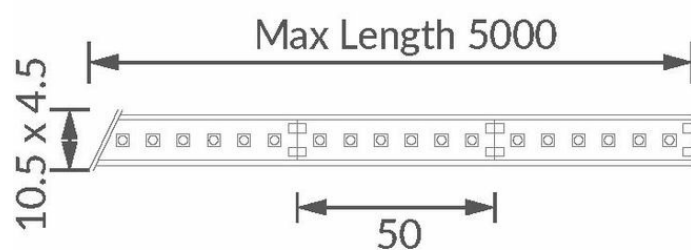


Dimensions in mm. Not to scale

Polar diagram

PRODUCT VARIATIONS

N/A	Lambertian	2400K	DALI dimmable
			1-10V dimmable
			Mains dimmable (phase cut dimming)
			Switched

Technical data figures are for guidance only and are subject to ±5% tolerance



CONTOUR HDX24 LED STRIP

EXTRA WARM WHITE LED STRIP FOR USE IN WET AREAS

ELECTRICAL INFORMATION	NORMAL	MAX
Forward Voltage (Vf) @ 85°C	24V DC	24V DC
Current Rating	N/A	N/A
Wattage	9W	9W
Source Type	LED	
Product Class	Class III (SELV low voltage)	

PHYSICAL DATA

Cable Size	
Cable Type	
Cable Length	200mm
Connector Type	Soldered by electrician on site
Weight	
Ambient Temperature (Ta) (in void)	-20 ... +45 °C

Technical data figures are for guidance only and are subject to ±5% tolerance

PROJECT REF _____

COMPLIANCE _____

