


LUCCA 60

MIDI UPLIGHT FOR ARCHITECTURAL LIGHTING


The Lucca 60 is an energy efficient LED midi uplight. It is ideal for creating stunning uplighting effects to columns, arches, window reveals, walls and trees where heat is an issue.

It is IP67 rated so ideal for use both inside and out. Available in narrow, medium and wide distributions, with additional elliptical and asymmetric variants for wall grazing and wall washing. Available both as a trim or trimless version. Trimless fittings come with a burial tube as standard.

LUMINAIRE DATA	NARROW	MEDIUM	WIDE
Beam Angle	13°	27°	36°
LED Source Lumens	555.2 lm	555.2 lm	555.2 lm
Luminaire Lumens	345 lm	230 lm	127 lm
Intensity Rating	5561	858	315
Power Consumption	6W	6W	6W
Luminaire Efficacy	57.5 lm/W	38.3 lm/W	21.2 lm/W
Colour Temperature	2700K		
CIE CRI available as	>90 Ra		
IES TM-30 Colour Fidelity (R _f)	>90		
IES TM-30 Colour Gamut (R _g)	>95		
Binning	2 SDCM		
Lifetime L70/B10 (hours)	>50000		
IP Rating	IP67		
IK Rating			

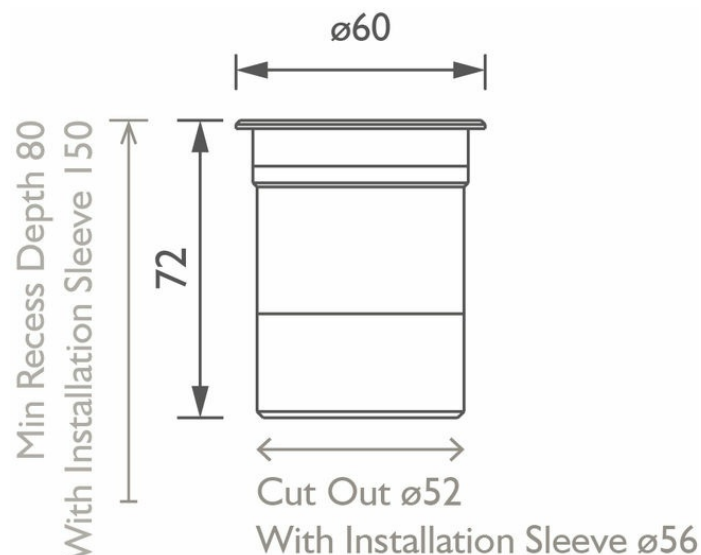

PROJECT REF _____

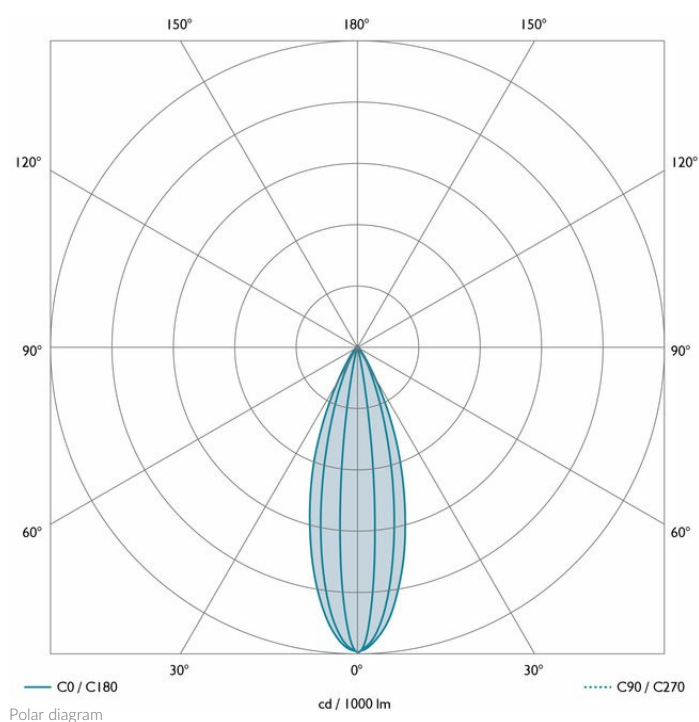

PRODUCT VARIATIONS

Black Anodised	Asymmetric	2700K	DALI dimmable
Brass	Elliptical		1-10V dimmable
Bronze Anodised	Medium		Mains dimmable (phase cut dimming)
Stainless Steel	Narrow		Switched
White RAL 9910	Wide		

Technical data figures are for guidance only and are subject to ±5% tolerance

www.johncullenlighting.com

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81



LUCCA 60

MIDI UPLIGHT FOR ARCHITECTURAL LIGHTING

ELECTRICAL INFORMATION	NORMAL	MAX
Forward Voltage (Vf) @ 85°C	12V DC	12V DC
Current Rating	500mA	500mA
Wattage	6W	6W
Source Type	LED	
Product Class	Class III (SELV low voltage)	

PHYSICAL DATA

Cable Size	2 off 7/0.2 (0.22mm ²)
Cable Type	2 Core Silicone (180 °C)
Cable Length	2000 mm
Connector Type	N/A
Weight	
Ambient Temperature (Ta) (in void)	-20 ... +40 °C

Technical data figures are for guidance only and are subject to ±5% tolerance

PROJECT REF _____

PRODUCT ACCESSORIES

IP66 enclosure for Driver Large	ACENIPLRG
IP66 enclosure for Driver Small	ACENIPSML
Lucca 60 Glare Cowl	ACL6GCXX1
Lucca 60 Trim Burial Sleeve	ACL6TRS1

COMPLIANCE

IEC/EN 60598-1:2015
IEC/EN 60598-2-2:2012
IEC/EN 60598-2-13:2006

