

SLIM CONTEMPORARY PICTURE LIGHT SPTM2XXXX

PROJECT REF _____

SLIM CONTEMPORARY LED PICTURE LIGHT

The Slim Contemporary Picture Light combines energy efficiency with excellent colour rendition. It has a minimum profile so as to not distract the eye from the art.

Available in a wide range of finishes and sizes, the elegant fitting offers the perfect solution to evenly lighting artwork in both contemporary and traditional interiors.


Contact us for more information.

LUMINAIRE DATA

Beam Angle	N/A
LED Source Lumens	N/A
Luminaire Lumens	184-1792 lm
Intensity Rating	N/A
Power Consumption	2.3W
Luminaire Efficacy	80 lm/W
Colour Temperature	2700K
CIE CRI available as	>90 Ra
IES TM-30 Colour Fidelity (R_f)	N/A
IES TM-30 Colour Gamut (R_g)	>95
Binning	N/A
Lifetime L70/B10 (hours)	>50000
IP Rating	IP20
IK Rating	N/A

DIMMABLE

Non - dimmable

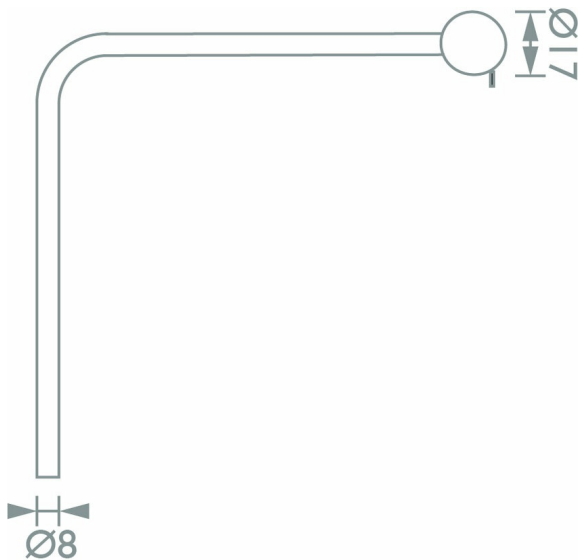

Dimensions in mm. Not to scale

Technical data figures are for guidance only and are subject to $\pm 5\%$ tolerance



SPTM2XXXX

SLIM CONTEMPORARY LED PICTURE LIGHT

ELECTRICAL INFORMATION	NORMAL	MAX
Forward Voltage (Vf) @ 85°C	3.3V DC	32V DC
Current Rating	700mA	700mA
Wattage	2.3W	22.4W
Source Type	LED	
Product Class	Class III (SELV low voltage)	

PHYSICAL DATA

Cable Size	N/A
Cable Type	N/A
Cable Length	N/A
Connector Type	N/A
Weight	N/A
Ambient Temperature (Ta) (in void)	N/A

Technical data figures are for guidance only and are subject to $\pm 5\%$ tolerance

PROJECT REF _____

PRODUCT ACCESSORIES

COMPLIANCE

