

comes as standard with a half snoot but other snoots are available as accessories.

MINIATURE SPIKE-MOUNTED ADJUSTABLE SPOTLIGHT


LUMINAIRE REF:

PROJECT REF:

The Kew 25 is a miniature spike mounted exterior spotlight. It is a garden light fitting ideal for highlighting small landscape features such as trees, pergolas, statues or foliage with a beam of directed light. Mounted on a spike, it can be repositioned in the earth as the planting grows and changes between seasons. The light is shielded within the fitting to precisely direct the light minimising glare. It

The colour and size of the fitting ensures it disappears into planting. The Kew is IP66 Rated - see FAQs for more details on IP Values.

OLIVE GREEN RAL 6003





NARROW

ACCESSORIES



66 ENCLOSURE FOR DRIVER LARGE ACENIPLRG



FOR DRIVER

SMALL

ACENIPSML

KEW 25 CAP SNOOT OLIVE GREEN ACK2CS251



KEW 25 FULL SNOOT OLIVE GREEN ACK2FS251



KEW 25 HALF F SNOOT OLIVE GREEN ACK2HS251



KEW 25 SHORT SNOOT OLIVE GREEN ACK2SS251



UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



WWW.JOHNCULLENLIGHTING.COM

UK CA

BRITISH



JOHN CULLEN


KEW 25 SPIKE MINIATURE SPIKE-MOUNTED ADJUSTABLE SPOTLIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	NARROW	MEDIUM	WIDE			
BEAM ANGLE (°)	11°	22°	30°			
LED SOURCE LUMENS (LM)	139	139	139			
LUMINAIRE LUMENS (LM)	94	93	85			
INTENSITY RATING (CD)	1349	479	263			
POWER CONSUMPTION (W)	1.5	1.5	1.5			
LUMINAIRE EFFICACY (LM/W)	62	62	56			
DRIVE CURRENT (mA)	N/A	N/A	N/A			
FORWARD VOLTAGE (V DC)	3	3	3			
INGRESS RATING				COLOUR TEMPERATURE		
IMPACT RATING				CIE CRI AVAILABLE AS		
COMPLIANCE	BS EN IEC 60598-1:2014			IES TM-30 COLOUR FIDELITY (Rf)	94.3	
	IEC 60598-2-7:1982/AMD1:1987/AMD2:1994			IES TM-30 COLOUR GAMUT (Rg)	98.1	
				BINNING	2 SDCM (Equivalent)	
				LIFETIME L70/B10 (HOURS)	>50000	
				AMBIENT TEMPERATURE (Ta)	-20 +40 °C	
ELECTRICAL				OTHER DATA		
SOURCE TYPE	LED		Cable Type		2 Core Silicone (180°C)	
PRODUCT CLASS	Class III (SELV low voltage)		Cable Size		6.4mm OD - 2 off 24/0.2 (0.75mm2)	
DIMMING PROTOCOL	DALI dimmable		Cable Length		2600mm	
	1-10V dimmable		Connector Typ	pe	IP67 Connector Box Included	
	Mains dimmable (phase cut dimming)		Weight		70g	

Fire rated

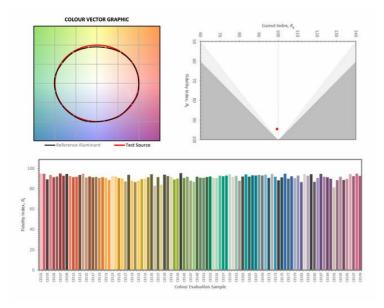

Switched



N/A





UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

 \odot John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



WWW.JOHNCULLENLIGHTING.COM