

KEW 40 SPIKE  
SPIKE-MOUNTED ADJUSTABLE SPOTLIGHT

LUMINAIRE REF:



PROJECT REF:




OLIVE GREEN

The Kew 40 Spike is a spiked garden light that will help bring your garden to life and assist with building a dramatic outdoor space for you to enjoy. This medium sized fitting is ideal for highlighting landscape features such as trees, pergolas or statues or foliage with a beam of directed light. Mounted on a spike, it can be repositioned in the earth as the planting grows and changes between seasons. The light is shielded within the fitting to precisely direct the light minimising glare. It comes as standard with a half snoot but other snoots are available as accessories.


The colour and size of the fitting ensures it disappears into planting. The Kew is IP66 Rated - see FAQs for more details on IP Values.

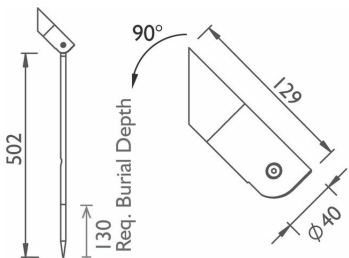

NARROW



MEDIUM



WIDE

ACCESSORIES



KEW 40 CAP  
SNOOT OLIVE  
GREEN  
ACK4CS251



KEW 40 FULL  
SNOOT OLIVE  
GREEN  
ACK4FS251



KEW 40 HALF  
SNOOT OLIVE  
GREEN  
ACK4HS251



KEW 40 SHORT  
SNOOT OLIVE  
GREEN  
ACK4SS251



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




KEW 40 SPIKE

SPIKE-MOUNTED ADJUSTABLE SPOTLIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	NARROW	MEDIUM	WIDE
BEAM ANGLE (°)	18°	27°	38°
LED SOURCE LUMENS (LM)	840 lm	840 lm	840 lm
LUMINAIRE LUMENS (LM)	572 lm	562 lm	450 lm
INTENSITY RATING (CD)	4451	1966	1045
POWER CONSUMPTION (W)	8W	8W	8W
LUMINAIRE EFFICACY (LM/W)	71.5 lm/W	70.3 lm/W	52.5 lm/W
DRIVE CURRENT (mA)	700mA	700mA	700mA
FORWARD VOLTAGE (V DC)	12V	12V	12V


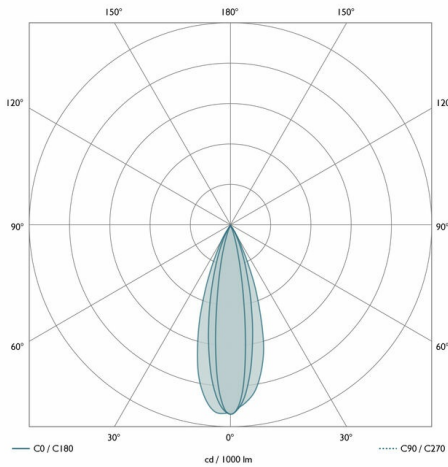


INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	BS EN IEC 60598-1:2014
	IEC 60598-2-7:1982/AMD1:1987/AMD2:1994

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>94 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
Cable Type	2 Core Silicone (180 °C)
Cable Size	6.4mm OD - 2 off 24/0.2 (0.75mm2)
Cable Length	1800mm
Connector Type	N/A
Weight	275g / 285g
Fire rated	N/A

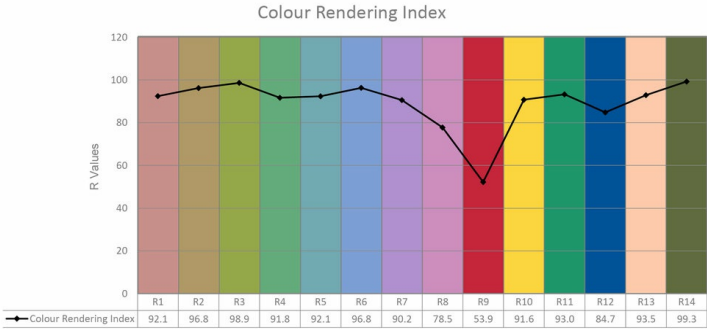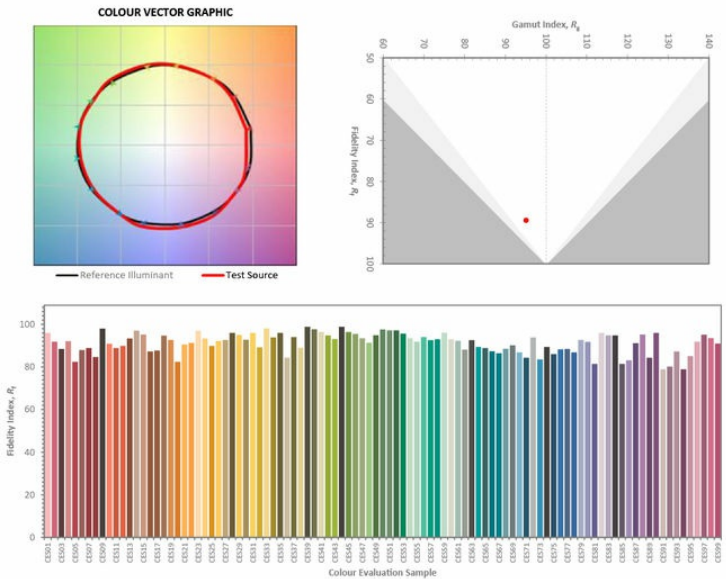

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

