

KEW 40 SPIKE
GLK4SM252

LUMINAIRE REF:

PROJECT REF:





OLIVE GREEN

DIRECTIONAL OLIVE GREEN MEDIUM SPIKE SPOTLIGHT

The Kew 40 is a medium sized spike mounted exterior spotlight. It is a garden light fitting ideal for highlighting landscape features such as trees, pergolas or statues or foliage with a beam of directed light. Mounted on a spike, it can be repositioned in the earth as the planting grows and changes between seasons. The light is shielded within the fitting to precisely direct the light minimising glare. It comes as standard with a half snoot but other snoots are available as accessories. Independently tested by the LIA.

The colour and size of the fitting ensures it disappears into planting. The Kew is IP66 Rated - see FAQs for more details on IP Values.

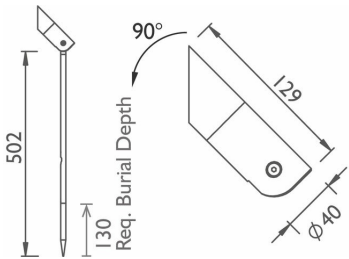

MEDIUM

ACCESSORIES

- 

IP66 ENCLOSURE
FOR DRIVER
LARGE
ACENIPLRG
- 

IP66 ENCLOSURE
FOR DRIVER
SMALL
ACENIPSML
- 

KEW 40 CAP
SNOOT OLIVE
GREEN
ACK4CS251
- 

KEW 40 FULL
SNOOT OLIVE
GREEN
ACK4FS251
- 

KEW 40 HALF
SNOOT OLIVE
GREEN
ACK4HS251



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




KEW 40 SPIKE

GLK4SM252

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	MEDIUM
BEAM ANGLE (°)	27°
LED SOURCE LUMENS (LM)	840 lm
LUMINAIRE LUMENS (LM)	562 lm
INTENSITY RATING (CD)	1966
POWER CONSUMPTION (W)	8W
LUMINAIRE EFFICACY (LM/W)	70.3 lm/W
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	12V

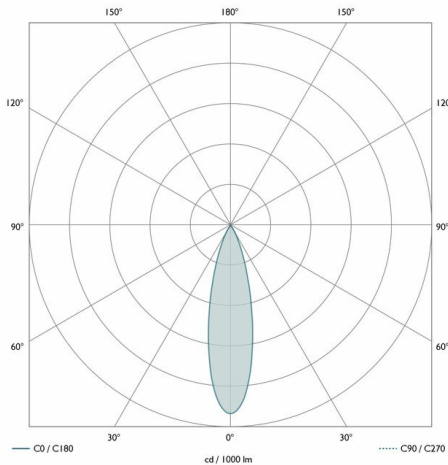

INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>94 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
Cable Type	2 Core Silicone (180 °C)
Cable Size	6.4mm OD - 2 off 24/0.2 (0.75mm2)
Cable Length	1800mm
Connector Type	N/A
Weight	285g
Fire rated	N/A

