

KEW 40 SURFACE

GLK4WN022

LUMINAIRE REF:



PROJECT REF:



BLACK RAL 9005

DIRECTIONAL BLACK NARROW WALL MOUNTED SPOTLIGHT

The Kew 40 Surface is a surface mounted IP66 spotlight, ideal for pinpointing landscape ornaments from above or wall grazing for use both inside and out. Our unique, patented wall mounting system allows for quick, tool-free installation on site. The luminaire mounts onto the wall bracket and is self-locking at 15° intervals, preventing the need for further fixing. A discreet, optional tamper proofing feature is available if required for commercial projects. Independently tested by the LIA.



NARROW

ACCESSORIES

- 

IP66 ENCLOSURE
FOR DRIVER
LARGE
ACENIPLRG
- 

IP66 ENCLOSURE
FOR DRIVER
SMALL
ACENIPSML
- 

KEW/HAMPTON
40 CONDUIT BOX
ACHK4CB1
- 

KEW 40 CAP
SNOOT BRONZE
ACK4CS061
- 

KEW 40 FULL
SNOOT BRONZE
ACK4FS061
- 

KEW 40 HALF
SNOOT BRONZE
ACK4HS061
- 

KEW 40 SHORT
SNOOT BRONZE
ACK4SS061




KEW 40 SURFACE
GLK4WN022

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	NARROW
BEAM ANGLE (°)	18°
LED SOURCE LUMENS (LM)	840 lm
LUMINAIRE LUMENS (LM)	572 lm
INTENSITY RATING (CD)	4451
POWER CONSUMPTION (W)	8W
LUMINAIRE EFFICACY (LM/W)	71.5 lm/W
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	12V

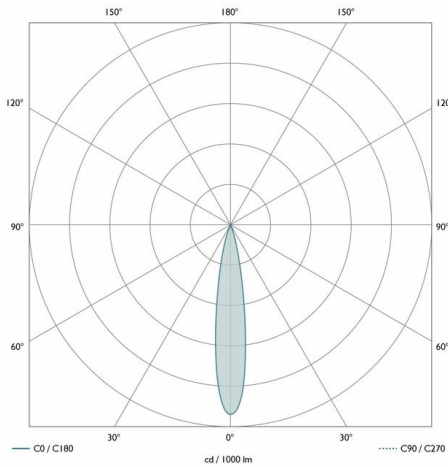

INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>94 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm ²)
CABLE LENGTH	350mm
CONNECTOR TYPE	N/A
WEIGHT	275g
FIRE RATED	N/A

