

KEW 40 SURFACE
GLK4WM022

LUMINAIRE REF:



PROJECT REF:



BLACK RAL 9005

DIRECTIONAL BLACK MEDIUM WALL MOUNTED SPOTLIGHT

The Kew 40 Surface is a surface mounted IP66 spotlight, ideal for pinpointing landscape ornaments from above or wall grazing for use both inside and out. Our unique, patented wall mounting system allows for quick, tool-free installation on site. The luminaire mounts onto the wall bracket and is self-locking at 15° intervals, preventing the need for further fixing. A discreet, optional tamper proofing feature is available if required for commercial projects. Independently tested by the LIA.

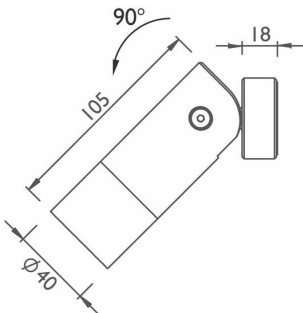

MEDIUM

ACCESSORIES



IP66 ENCLOSURE
FOR DRIVER
LARGE
ACENIPLRG



IP66 ENCLOSURE
FOR DRIVER
SMALL
ACENIPSML



KEW/HAMPTON
40 CONDUIT BOX
ACHK4CB1



KEW 40 CAP
SNOOT BLACK
ACK4CS021



KEW 40 FULL
SNOOT BLACK
ACK4FS021



KEW 40 HALF
SNOOT BLACK
ACK4HS021



KEW 40 SHORT
SNOOT BLACK
ACK4SS021



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




KEW 40 SURFACE
GLK4WM022

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	MEDIUM
BEAM ANGLE (°)	27°
LED SOURCE LUMENS (LM)	840 lm
LUMINAIRE LUMENS (LM)	562 lm
INTENSITY RATING (CD)	1966
POWER CONSUMPTION (W)	8W
LUMINAIRE EFFICACY (LM/W)	70.3 lm/W
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	12V


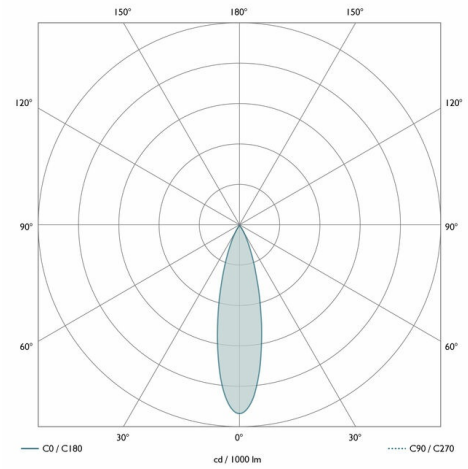


INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>94 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm ²)
CABLE LENGTH	350mm
CONNECTOR TYPE	N/A
WEIGHT	275g
FIRE RATED	N/A

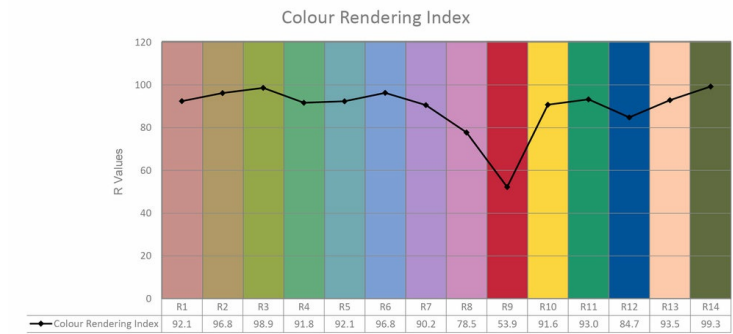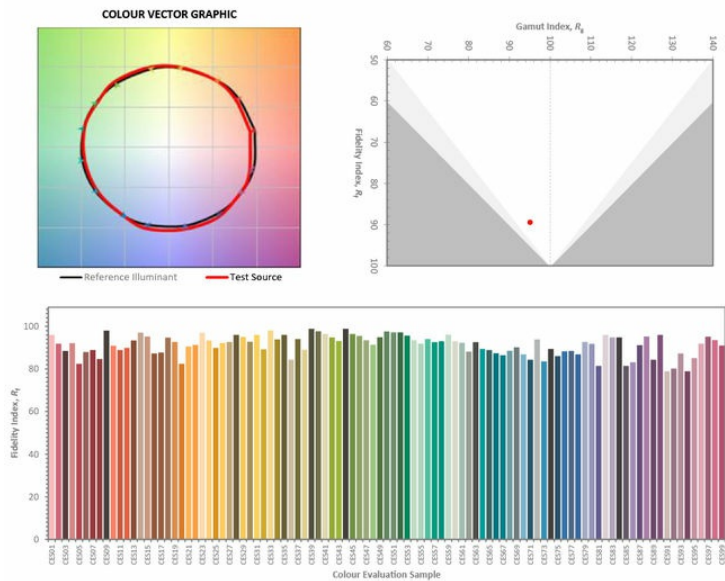

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81