

HAMPTON 25 SPIKE
MINIATURE SPIKE-MOUNTED ADJUSTABLE FLOODLIGHT

LUMINAIRE REF:



PROJECT REF:



OLIVE GREEN RAL 6003

The Hampton 25 is a miniature spike mounted exterior floodlight. It is a versatile garden light fitting, ideal for highlighting pathways, planting and washing over small shrubbery. Mounted on a spike, it can be repositioned in the earth as the planting grows and changes between seasons.

The colour and size of the fitting ensures it disappears into planting so just the lighting effect is seen. The Hampton is IP66 rated - see FAQs for more details on IP Values.

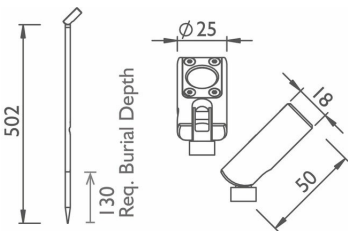

FLOOD

ACCESSORIES



IP66 ENCLOSURE
FOR DRIVER
LARGE
ACENIPLRG



IP66 ENCLOSURE
FOR DRIVER
SMALL
ACENIPSML



KEW/HAMPTON
40 CONDUIT BOX
ACHK4CB1



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81



HAMPTON 25 SPIKE
MINIATURE SPIKE-MOUNTED ADJUSTABLE FLOODLIGHT

LUMINAIRE REF:

PROJECT REF:



SPECIFICATION	FLOOD
BEAM ANGLE (°)	109°
LED SOURCE LUMENS (LM)	139
LUMINAIRE LUMENS (LM)	105
INTENSITY RATING (CD)	48
POWER CONSUMPTION (W)	1.5
LUMINAIRE EFFICACY (LM/W)	70
DRIVE CURRENT (mA)	N/A
FORWARD VOLTAGE (V DC)	3

INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	BS EN IEC 60598-1:2014
	IEC 60598-2-7:1982/AMD1:1987/AMD2:1994

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	94.3
IES TM-30 COLOUR GAMUT (Rg)	98.1
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180°C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	2600mm
CONNECTOR TYPE	IP67 Connector Box Included
WEIGHT	60g
FIRE RATED	N/A

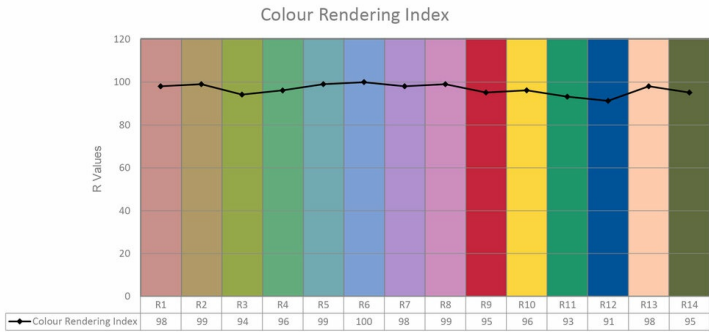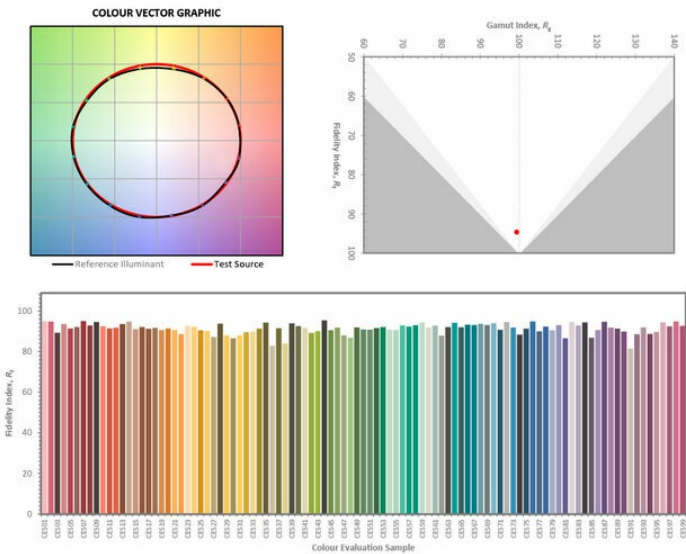

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

