

HAMPTON 40 SPIKE
SPIKE-MOUNTED DIRECTIONAL FLOODLIGHT



LUMINAIRE REF:

PROJECT REF:



The Hampton 40 is a spike mounted exterior floodlight. It is a versatile garden light fitting, ideal for highlighting pathways, planting and washing over medium sized shrubbery. Mounted on a spike, it can be repositioned in the earth as the planting grows and changes between seasons.

The colour and size of the fitting ensures it disappears into planting so just the lighting effect is seen. The Hampton is IP66 rated - see FAQs for more details on IP Values.



FLOOD

ACCESSORIES

IP66 ENCLOSURE
FOR DRIVER
LARGE
ACENIPLRG

IP66 ENCLOSURE
FOR DRIVER
SMALL
ACENIPSML

KEW/HAMPTON
40 CONDUIT BOX
ACHK4CB1




HAMPTON 40 SPIKE
SPIKE-MOUNTED DIRECTIONAL FLOODLIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	FLOOD
BEAM ANGLE (°)	112°
LED SOURCE LUMENS (LM)	840 lm
LUMINAIRE LUMENS (LM)	601 lm
INTENSITY RATING (CD)	185
POWER CONSUMPTION (W)	8W
LUMINAIRE EFFICACY (LM/W)	75.1 lm/W
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	12V


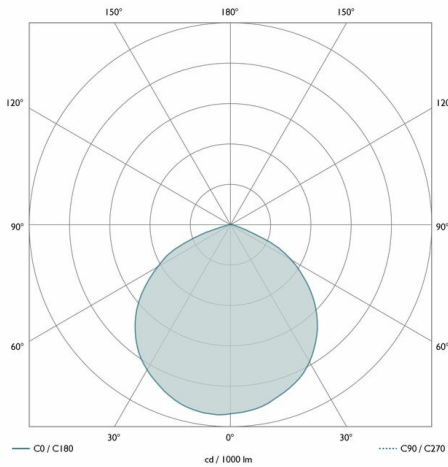


INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	BS EN IEC 60598-1:2014
	IEC 60598-2-7:1982/AMD1:1987/AMD2:1994

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>92 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm ²)
CABLE LENGTH	1600mm
CONNECTOR TYPE	N/A
WEIGHT	90g / 100g
FIRE RATED	N/A

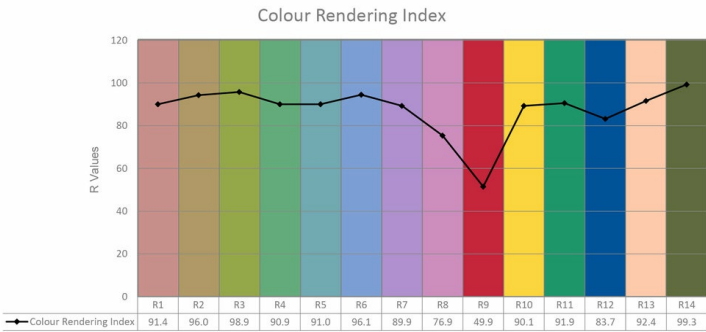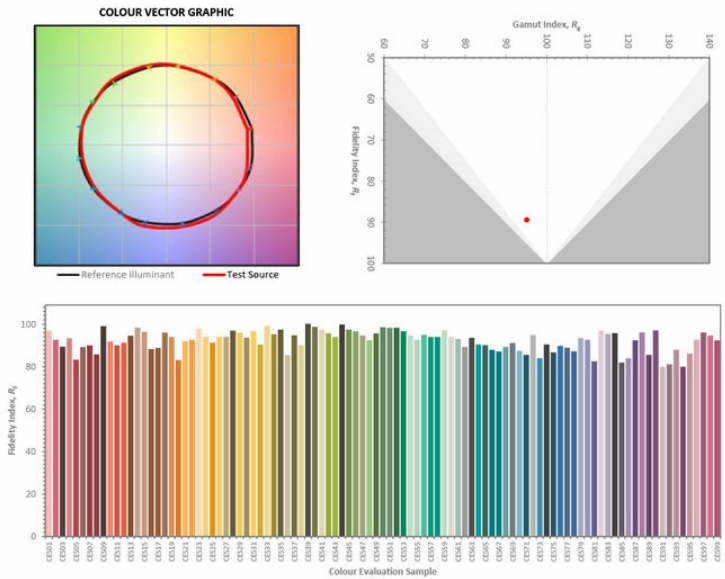

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

