

HAMPTON 25 SURFACE  
MINIATURE SURFACE-MOUNTED ADJUSTABLE FLOODLIGHT


LUMINAIRE REF:

PROJECT REF:

The Hampton 25 is a miniature surface mounted IP66 floodlight, ideal for wall washing and general area lighting for use both inside and out. Our unique, patented wall mounting system allows for quick, tool-free installation on site. The luminaire mounts onto the wall bracket and is self-locking at 15° intervals, preventing the need for further fixing. A discreet, optional tamper proofing feature is available if required for commercial projects. The Hampton is IP66 Rated - see FAQs for more details on IP Values.



BRONZE RAL 8019

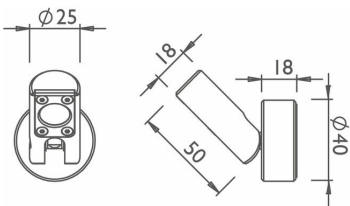

FLOOD

ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML



KEW/HAMPTON  
40 CONDUIT BOX  
ACHK4CB1



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81



HAMPTON 25 SURFACE  
MINIATURE SURFACE-MOUNTED ADJUSTABLE FLOODLIGHT

LUMINAIRE REF:

PROJECT REF:



SPECIFICATION	FLOOD
BEAM ANGLE (°)	109°
LED SOURCE LUMENS (LM)	139
LUMINAIRE LUMENS (LM)	105
INTENSITY RATING (CD)	48
POWER CONSUMPTION (W)	1.5
LUMINAIRE EFFICACY (LM/W)	70
DRIVE CURRENT (mA)	N/A
FORWARD VOLTAGE (V DC)	3

INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	BS EN IEC 60598-1:2014
	IEC 60598-2-7:1982/AMD1:1987/AMD2:1994

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	94.3
IES TM-30 COLOUR GAMUT (Rg)	98.1
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180°C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm <sup>2</sup> )
CABLE LENGTH	350mm
CONNECTOR TYPE	N/A
WEIGHT	50g
FIRE RATED	N/A

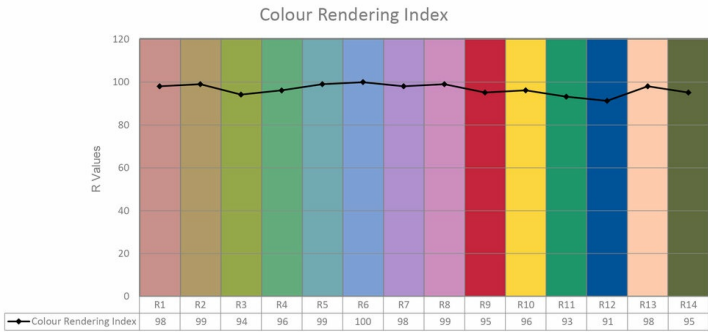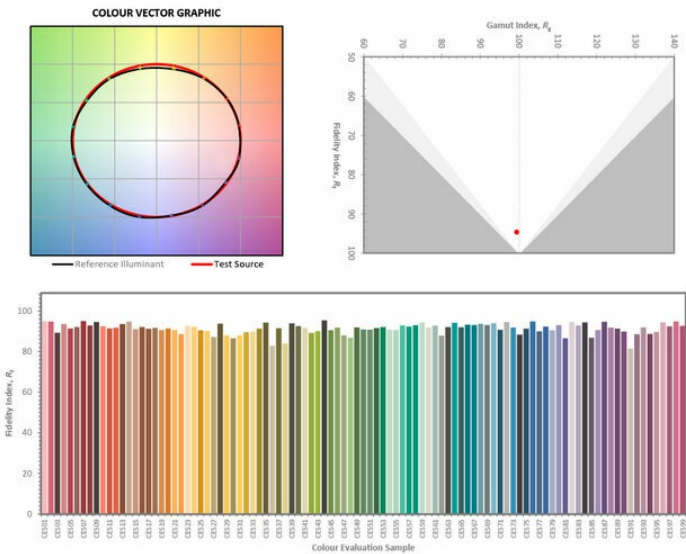

WWW.JOHNCCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

