

HAMPTON 40 SURFACE
SURFACE-MOUNTED DIRECTIONAL FLOODLIGHT

LUMINAIRE REF:

PROJECT REF:




The Hampton 40 is a surface mounted IP66 floodlight, ideal for wall washing and general area lighting for use both inside and out. Our unique, patented wall mounting system allows for quick, tool-free installation on site. The luminaire mounts onto the wall bracket and is self-locking at 15° intervals, preventing the need for further fixing. A discreet, optional tamper proofing feature is available if required for commercial projects.

The Hampton is IP66 Rated - see FAQs for more details on IP Values.



BRONZE

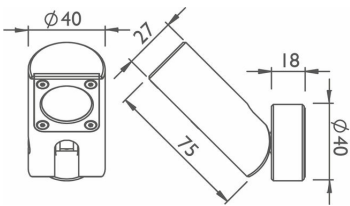

FLOOD

ACCESSORIES



IP66 ENCLOSURE
FOR DRIVER
LARGE
ACENIPLRG



IP66 ENCLOSURE
FOR DRIVER
SMALL
ACENIPSML



KEW/HAMPTON
40 CONDUIT BOX
ACHK4CB1



WWW.JOHNCCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




HAMPTON 40 SURFACE
SURFACE-MOUNTED DIRECTIONAL FLOODLIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	FLOOD
BEAM ANGLE (°)	112°
LED SOURCE LUMENS (LM)	840 lm
LUMINAIRE LUMENS (LM)	601 lm
INTENSITY RATING (CD)	185
POWER CONSUMPTION (W)	8W
LUMINAIRE EFFICACY (LM/W)	75.1 lm/W
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	12V


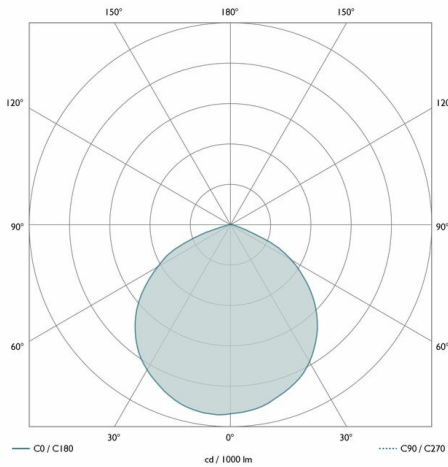


INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	BS EN IEC 60598-1:2015
	BS 4533:SECTION 102.1:1990/EN 60598-2-1:1989

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>92 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm ²)
CABLE LENGTH	350mm
CONNECTOR TYPE	N/A
WEIGHT	90g / 100g
FIRE RATED	N/A

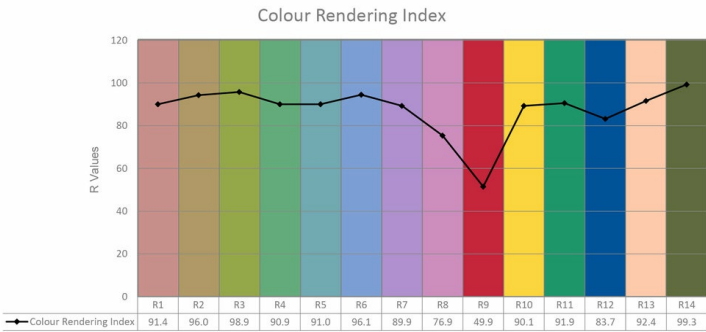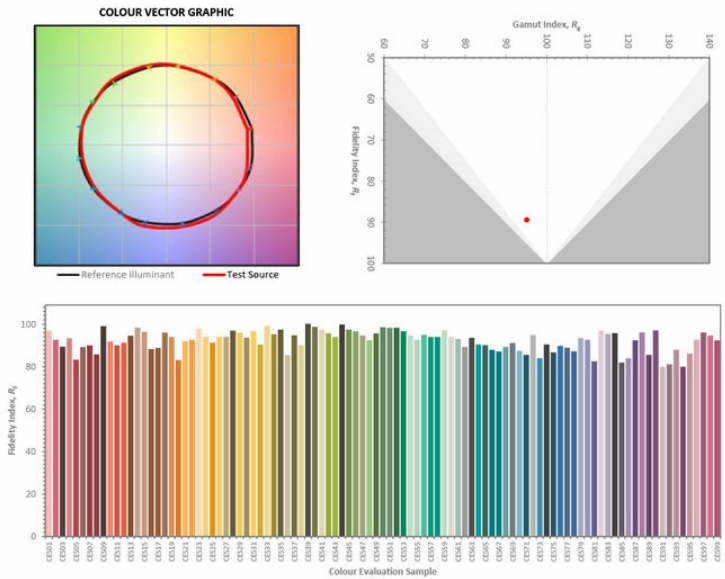

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

