

VORSA FIX 30  
FIXED MOUNTED DIRECTIONAL SPOTLIGHT

LUMINAIRE REF:

PROJECT REF:



The Vorsa Fix 30 spotlight is a versatile mini surface-mounted directional spotlight. This fitting is ideal for use in areas such as living areas, hallways, kitchens, and dining rooms, as well as other key areas of the home. It is perfect for use on beams and concrete ceilings where recessed fittings are unsuitable.


This relatively small spotlight is discreet and easy to direct the light to where required. The fitting has a deep baffle which ensures that glare is minimised.



WHITE RAL 9910



BLACK RAL 9005

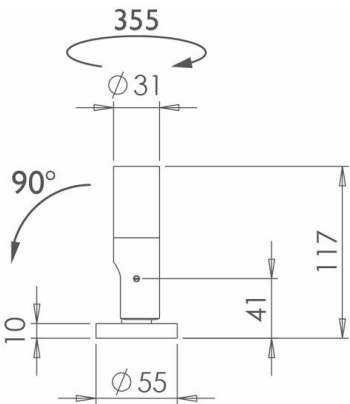

NARROW



MEDIUM

ACCESSORIES



VORSA 30  
HONEYCOMB  
INSERT Ø27.5MM  
ACHCVO301



VORSA 30 LINEAR  
SPREADER LENS  
Ø27.5MM  
ACLLVO301



VORSA 30 SAND  
BLASTED GLASS  
LENS Ø27.5MM  
ACSGVO301



VORSA 30 HIGH  
TRANSMISSION  
SOFTENING LENS  
Ø27.5MM  
ACSLVO301



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81



VORSA FIX 30  
FIXED MOUNTED DIRECTIONAL SPOTLIGHT

LUMINAIRE REF:

PROJECT REF:

| SPECIFICATION             | NARROW | MEDIUM |
|---------------------------|--------|--------|
| BEAM ANGLE (°)            | 8°     | 25°    |
| LED SOURCE LUMENS (LM)    | 172    | 400    |
| LUMINAIRE LUMENS (LM)     | 155    | 325    |
| INTENSITY RATING (CD)     | 5360   | 1540   |
| POWER CONSUMPTION (W)     | 2.1    | 3.9    |
| LUMINAIRE EFFICACY (LM/W) | 75     | 83     |
| DRIVE CURRENT (mA)        | 700    | 350    |
| FORWARD VOLTAGE (V DC)    | N/A    | N/A    |
|                           |        |        |
|                           |        |        |
|                           |        |        |

|                |                     |
|----------------|---------------------|
| INGRESS RATING | IP20                |
| IMPACT RATING  | IK03                |
| COMPLIANCE     | IEC/EN 60598-1:2015 |
|                |                     |

|                                |                |
|--------------------------------|----------------|
| COLOUR TEMPERATURE             | 2700K          |
| CIE CRI AVAILABLE AS           | >90 Ra         |
| IES TM-30 COLOUR FIDELITY (Rf) | 90             |
| IES TM-30 COLOUR GAMUT (Rg)    | >95            |
| BINNING                        | N/A            |
| LIFETIME L70/B10 (HOURS)       | >50000         |
| AMBIENT TEMPERATURE (Ta)       | -20 ... +35 °C |

| ELECTRICAL       |                              |
|------------------|------------------------------|
| SOURCE TYPE      | LED                          |
| PRODUCT CLASS    | Class III (SELV low voltage) |
| DIMMING PROTOCOL | DALI/Phase cut/1-10V         |

| OTHER DATA     |                       |
|----------------|-----------------------|
| CABLE TYPE     | 2 Core PTFE (200 °C)  |
| CABLE SIZE     | 2 off 7/0.2 (0.22mm2) |
| CABLE LENGTH   | 300mm                 |
| CONNECTOR TYPE | Leads included        |
| WEIGHT         | N/A                   |
| FIRE RATED     | N/A                   |

