

## WALLACE 4530 RAL COLOUR MATCH WA4530XX1

LUMINAIRE REF:

PROJECT REF:




RAL MATCH

## SLIM-LINE RAL COLOUR MATCH LED PICTURE LIGHT

The Wallace Picture Light uses cutting-edge technology to provide an even distribution of light to precisely focus on your whole canvas. With an exceptionally high CRI of 97 (R9 value of 90), you can be sure that the true colours of your art will be seen at night. This low glare, easy to install picture light can be mounted both on the wall or the frame. The unique discreet shape shields the light from all angles to minimise glare

The Wallace Picture Light comes with six different head sizes and four arm lengths to fit your art more precisely. Use the chart or ask sales to help select the best size to light your picture. Independently tested by the LIA.





EXTRA WIDE



WWW.JOHNCULLENLIGHTING.COM UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81


© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE






WALLACE 4530 RAL COLOUR MATCH			LUMINAIRE REF:	
WA4530XX1			PROJECT REF:	
SPECIFICATION	EXTRA WIDE			
BEAM ANGLE (°)	Wide			
LED SOURCE LUMENS (LM)	515 lm			
LUMINAIRE LUMENS (LM)	464 lm			
INTENSITY RATING (CD)	N/A			
POWER CONSUMPTION (W)	6W			
LUMINAIRE EFFICACY (LM/W)	80 lm/W			
DRIVE CURRENT (mA)	350mA			
FORWARD VOLTAGE (V DC)	16.5V DC			
			1000	
INGRESS RATING			MPERATURE	
IMPACT RATING			AILABLE AS	
COMPLIANCE	IEC/EN 60598-1:2015	IES TM-30 COLOUR F		
		IES TM-30 COLOUR (		
				2 SDCM (Equivalent)
		LIFETIME L70/B1		
		AMBIENT TEMPER	RATURE (Ta)	-20 +35 °C
ELECTRICAL		OTHER DATA		
SOURCE TYPE		Cable Type		2 Core PTFE (200 °C)
	Class III (SELV low voltage)	Cable Size		2 off 7/0.2 (0.22mm2)
DIMMING PROTOCOL		Cable Length		300mm
	DALI dimmable	Connector Type		N/A
	Mains dimmable (phase cut dimming)	Weight		500g
	· .and animable (phase cut dimining)	Fire rated		N/A
		. ne lateu		
COLOUR VECTOR GRAPHIC				

1N " | EN

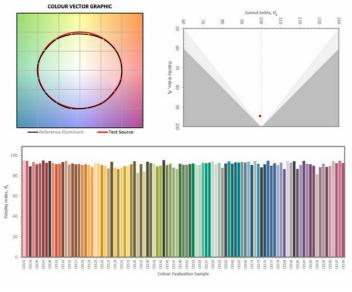







WWW.JOHNCULLENLIGHTING.COM UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE

