

## WALLACE 6030 ANTIQUE BRASS WA6030041

LUMINAIRE REF:

PROJECT REF:




ANTIQUE BRASS

## SLIM-LINE ANTIQUE BRASS LED PICTURE LIGHT

The Wallace Picture Light uses cutting-edge technology to provide an even distribution of light to precisely focus on your whole canvas. With an exceptionally high CRI of 97 (R9 value of 90), you can be sure that the true colours of your art will be seen at night. This low glare, easy to install picture light can be mounted both on the wall or the frame. The unique discreet shape shields the light from all angles to minimise glare

The Wallace Picture Light comes with six different head sizes and four arm lengths to fit your art more precisely. Use the chart or ask sales to help select the best size to light your picture. Independently tested by the LIA.





EXTRA WIDE



WWW.JOHNCULLENLIGHTING.COM UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

© John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to ±5% tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE






## WALLACE 6030 ANTIQUE BRASS WA6030041


LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	EXTRA WIDE		
BEAM ANGLE (°)	Wide		
LED SOURCE LUMENS (LM)	687 lm		
LUMINAIRE LUMENS (LM)	618 lm		
INTENSITY RATING (CD)	N/A		
POWER CONSUMPTION (W)	8W		
LUMINAIRE EFFICACY (LM/W)	80 lm/W		
DRIVE CURRENT (mA)	350mA		
FORWARD VOLTAGE (V DC)	22V DC		
INGRESS RATING		COLOUR TEMPERATURE	
IMPACT RATING		CIE CRI AVAILABLE AS	
COMPLIANCE	IEC/EN 60598-1:2015	IES TM-30 COLOUR FIDELITY (Rf)	
		IES TM-30 COLOUR GAMUT (Rg)	
			2 SDCM (Equivalent)
		LIFETIME L70/B10 (HOURS)	
		AMBIENT TEMPERATURE (Ta)	-20 +35 °C
ELECTRICAL		OTHER DATA	
SOURCE TYPE	LED	Cable Type	2 Core PTFE (200 °C)
PRODUCT CLASS	Class III (SELV low voltage)	Cable Size	2 off 7/0.2 (0.22mm2)
DIMMING PROTOCOL	1-10V dimmable	Cable Length	300mm
	DALI dimmable	Connector Type	N/A
		Weight	N/A
	Mains dimmable (phase cut dimming)	A A G B I I'	11/7

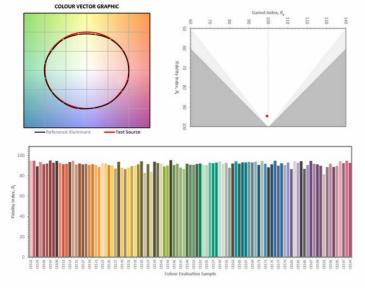







UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

 $\odot$  John Cullen Lighting 2024. Technical data figures are for guidance only and are subject to  $\pm 5\%$  tolerance We reserve the right to change the design and specification of our product range without prior notice. E&OE



WWW.JOHNCULLENLIGHTING.COM