

LUCCA 60 TRIMLESS ELLIPTICAL BLACK  
ULL6FE022

LUMINAIRE REF:

PROJECT REF:





BLACK ANODISED

BLACK MEDIUM BEAM TRIMLESS UPLIGHT FOR USE IN ARCHITECTURAL LIGHTING, BOTH INSIDE AND OUT.

The Lucca 60 is an energy efficient trimless LED midi uplight. It is ideal for creating stunning uplighting effects to columns, arches, window reveals, walls and trees. Available in narrow, medium and wide distributions, with additional elliptical and asymmetric variants for wall grazing and wall washing. Trimless fittings come with a burial tube as standard.

It is IP67 rated so ideal for use both inside and out. If using inside, the warranty increases to 5 years.

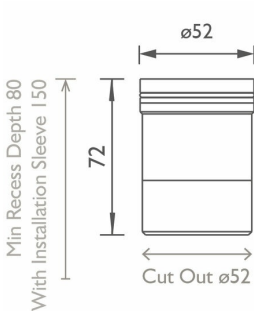

ELLIPTICAL

ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




LUCCA 60 TRIMLESS ELLIPTICAL BLACK  
ULL6FE022

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	ELLIPTICAL
BEAM ANGLE (°)	Elliptical
LED SOURCE LUMENS (LM)	516 lm
LUMINAIRE LUMENS (LM)	262 lm
INTENSITY RATING (CD)	1021
POWER CONSUMPTION (W)	6W
LUMINAIRE EFFICACY (LM/W)	44 lm/W
DRIVE CURRENT (mA)	500mA
FORWARD VOLTAGE (V DC)	12V DC

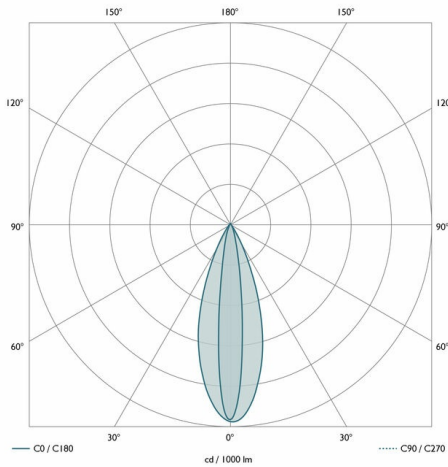


INGRESS RATING	IP67
IMPACT RATING	IK10
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012
	IEC/EN 60598-2-13:2006

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>90 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	>95
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	2 off 7/0.2 (0.22mm2)
CABLE LENGTH	1000mm
CONNECTOR TYPE	N/A
WEIGHT	N/A
FIRE RATED	N/A

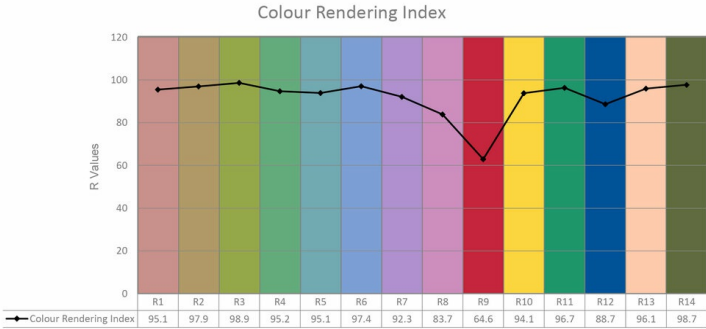

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

