

LUCCA 60 ASYMMETRIC STAINLESS STEEL  
ULL6TA172



LUMINAIRE REF:

PROJECT REF:



STAINLESS STEEL

STAINLESS STEEL NARROW BEAM UPLIGHT FOR USE IN ARCHITECTURAL LIGHTING, BOTH INSIDE AND OUT.  
The Lucca 60 is an energy efficient LED midi uplight. It is ideal for creating stunning uplighting effects such as wall washing where heat is an issue. The asymmetric variant directs light ~20° towards a surface. It can be used both inside and out. If used inside the warranty increases to 5 years.

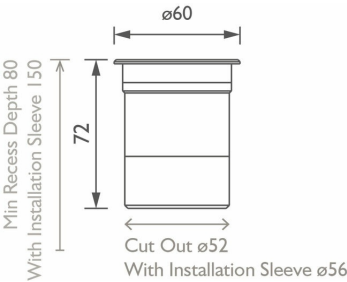

ASYMMETRIC

ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML



LUCCA 60 TRIM  
BURIAL SLEEVE  
ACL6TRS1



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81



LUCCA 60 ASYMMETRIC STAINLESS STEEL  
ULL6TA172

LUMINAIRE REF:

PROJECT REF:


SPECIFICATION	ASYMMETRIC
BEAM ANGLE (°)	Asymmetric
LED SOURCE LUMENS (LM)	516 lm
LUMINAIRE LUMENS (LM)	N/A
INTENSITY RATING (CD)	N/A
POWER CONSUMPTION (W)	6W
LUMINAIRE EFFICACY (LM/W)	N/A
DRIVE CURRENT (mA)	500mA
FORWARD VOLTAGE (V DC)	12V DC

INGRESS RATING	IP67
IMPACT RATING	N/A
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012
	IEC/EN 60598-2-13:2006

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>90 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	>95
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	2 off 7/0.2 (0.22mm2)
CABLE LENGTH	1000mm
CONNECTOR TYPE	N/A
WEIGHT	N/A
FIRE RATED	N/A

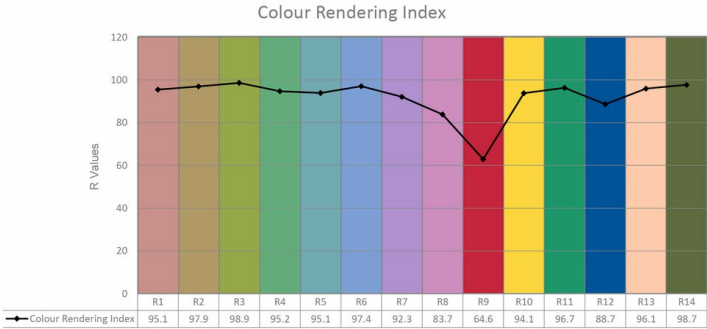

WWW.JOHN CULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

