

LUCCA 60 NARROW BRONZE  
ULL6TN062

LUMINAIRE REF:



PROJECT REF:



BRONZE ANODISED

BRONZE NARROW BEAM UP OR DOWNLIGHT FOR USE IN ARCHITECTURAL LIGHTING, BOTH INSIDE AND OUT.

The Lucca 60 is an energy efficient LED midi uplight. It is ideal for creating stunning uplighting effects to columns, arches, window reveals, walls and trees where heat is an issue. This product can be used both inside and out. If used inside the warranty increases to 5 years.

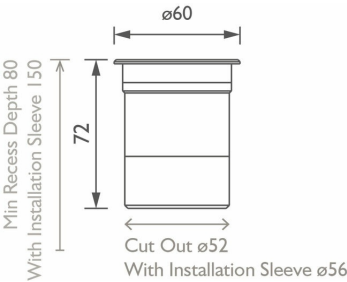

NARROW

ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML



LUCCA 60 TRIM  
BURIAL SLEEVE  
ACL6TRS1




LUCCA 60 NARROW BRONZE  
ULL6TN062

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	NARROW
BEAM ANGLE (°)	18°
LED SOURCE LUMENS (LM)	516 lm
LUMINAIRE LUMENS (LM)	368 lm
INTENSITY RATING (CD)	2923
POWER CONSUMPTION (W)	6W
LUMINAIRE EFFICACY (LM/W)	61.3 lm/W
DRIVE CURRENT (mA)	500mA
FORWARD VOLTAGE (V DC)	12V DC

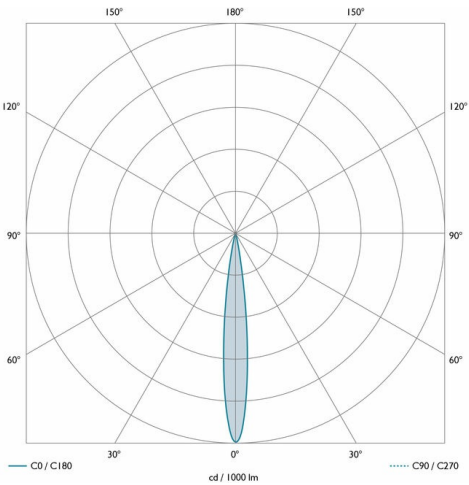


INGRESS RATING	IP67
IMPACT RATING	N/A
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012
	IEC/EN 60598-2-13:2006

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	92 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	>95
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	2 off 7/0.2 (0.22mm2)
CABLE LENGTH	1000mm
CONNECTOR TYPE	N/A
WEIGHT	N/A
FIRE RATED	N/A

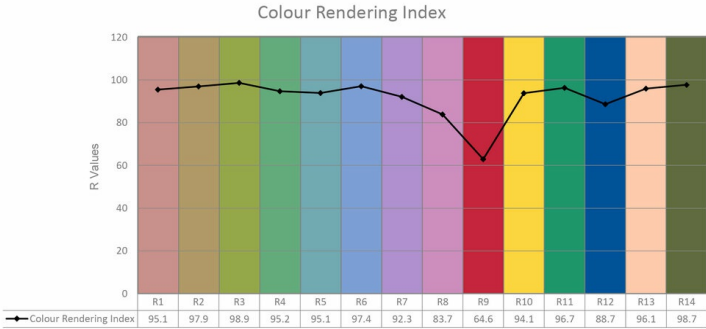

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

