

MINIM
RECESSED JOINERY LIGHT

LUMINAIRE REF:


PROJECT REF:

The Minim is a precision-engineered miniature LED joinery light. This unique shelf light can be used for recessed task and display lighting throughout the home, hospitality, or yacht projects. It is suitable for under-shelf lighting, bespoke cabinetry, and retail lighting.

The Minim comes without a bezel as standard but a decorative bezel can be added in a range of finishes as an accessory. Any finishes not stocked can be accommodated with a short lead time.



BLACK

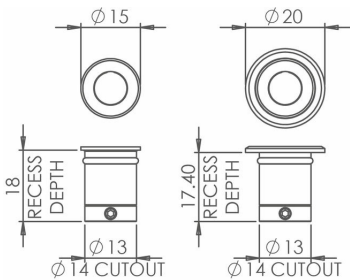

NARROW



MEDIUM



WIDE

ACCESSORIES



MINIM
ACCESSORY BEZEL
WHITE
ACMBFX011



MINIM
ACCESSORY BEZEL
BRASS
ACMBFX041



MINIM
ACCESSORY BEZEL
NICKEL
ACMBFX091



MINIM
ACCESSORY BEZEL
BRONZE
ACMBFX181



WWW.JOHN CULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




MINIM
RECESSED JOINERY LIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	NARROW	MEDIUM	WIDE
BEAM ANGLE (°)	19°	40°	80°
LED SOURCE LUMENS (LM)	90 lm	90 lm	90 lm
LUMINAIRE LUMENS (LM)	76 lm	73 lm	70 lm
INTENSITY RATING (CD)	253	352	110
POWER CONSUMPTION (W)	1 W	1 W	1 W
LUMINAIRE EFFICACY (LM/W)	76 lm/W	73 lm/W	70 lm/W
DRIVE CURRENT (mA)	350mA	350mA	350mA
FORWARD VOLTAGE (V DC)	2.7V DC	2.7V DC	2.7V DC


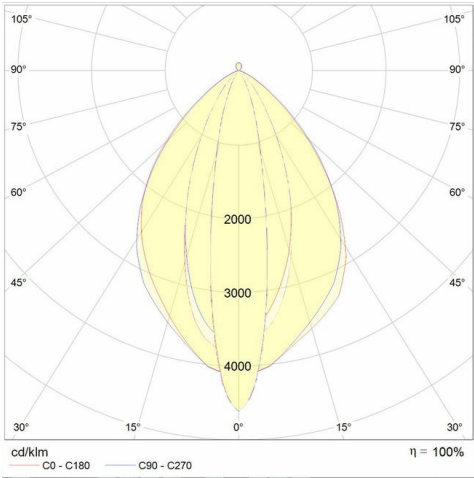


INGRESS RATING	IP20
IMPACT RATING	IK02
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	97 Ra
IES TM-30 COLOUR FIDELITY (Rf)	N/A
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +35 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	FEP Insulation Wire
CABLE SIZE	2 off 19/0.2 (0.41mm2) Tinned Copper Strands
CABLE LENGTH	800mm
CONNECTOR TYPE	N/A
WEIGHT	N/A
FIRE RATED	N/A

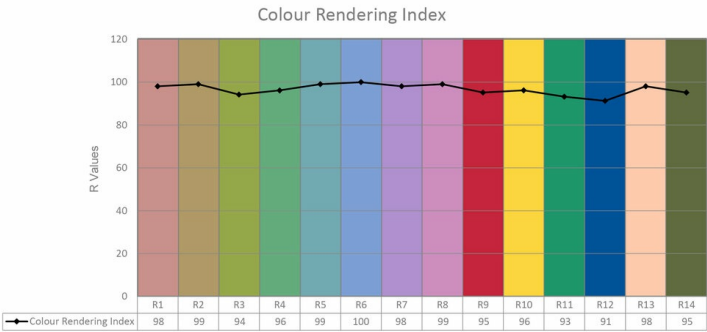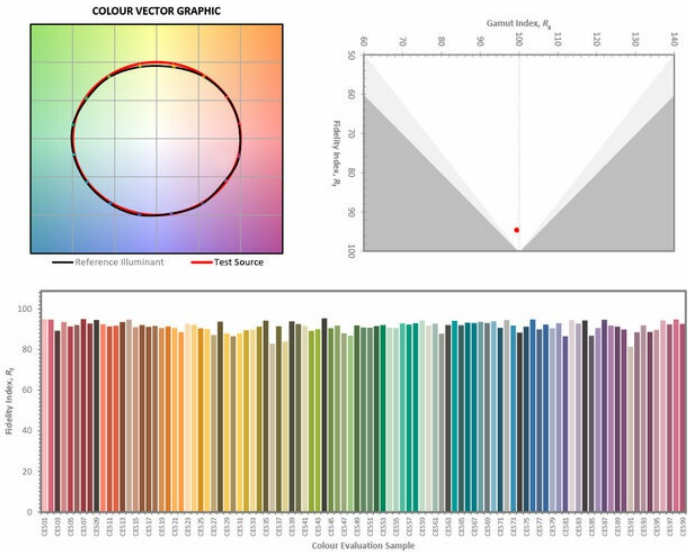

WWW.JOHN CULLEN LIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

