

MINIM BLACK 2700K WIDE

SCMW27161

LUMINAIRE REF:


PROJECT REF:



RECESSED JOINERY LIGHT

The Minim is a precision-engineered miniature LED joinery light. This unique shelf light can be used for recessed task and display lighting throughout the home, hospitality, or yacht projects. It is suitable for under-shelf lighting, bespoke cabinetry, and retail lighting.

The Minim comes without a bezel as standard but a decorative bezel can be added in a range of finishes as an accessory. Any finishes not stocked can be accommodated with a short lead time.





WIDE

ACCESSORIES





WWW.JOHNCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81








MINIM BLACK 2700K WIDE

SCMW27161

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	WIDE
BEAM ANGLE (°)	80°
LED SOURCE LUMENS (LM)	90 lm
LUMINAIRE LUMENS (LM)	70 lm
INTENSITY RATING (CD)	110
POWER CONSUMPTION (W)	1 W
LUMINAIRE EFFICACY (LM/W)	70 lm/W
DRIVE CURRENT (mA)	350mA
FORWARD VOLTAGE (V DC)	2.7V DC




IMPACT RATING IK02 COMPLIANCE IEC/EN 60598-1:2015	INGRESS RATING	IP20
COMPLIANCE IEC/EN 60598-1:2015	IMPACT RATING	IK02
	COMPLIANCE	IEC/EN 60598-1:2015
IEC/EN 60598-2-2:2012		IEC/EN 60598-2-2:2012

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	97 Ra
IES TM-30 COLOUR FIDELITY (Rf)	N/A
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 +35 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	FEP Insulation Wire
CABLE SIZE	2 off 19/0.2 (0.41mm2) Tinned Copper Strands
CABLE LENGTH	800mm
CONNECTOR TYPE	N/A
WEIGHT	N/A
FIRE RATED	N/A

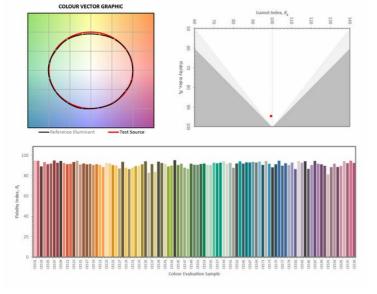



R1 R2 R3 R4 R5 R6 R7 98 99 94 96 99 100 98



WWW.JOHNCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

