

CONTOUR EDGE 75 BLACK ANODISED  
LLCE7U161

LUMINAIRE REF:

PROJECT REF:





BLACK ANODISED

750MM IN-GROUND LOW GLARE WALL GRAZER

The Contour Edge is an in-ground wall grazer delivering the highest quality of light with the lowest glare in the most discreet housing possible. It comes in 4 sizes - 250mm, 500mm, 750mm and 1000mm, which can be easily paired together to create a longer run ensuring a continuous graze.

It is ideal as both an interior or exterior wall grazer when you require uniform light up a wall. If using inside, the warranty increases to 5 years.



ELLIPTICAL

ACCESSORIES



CONTOUR EDGE  
INSTALLATION  
SLEEVE  
CONNECTOR  
ACCECNCTR1



CONTOUR EDGE  
100 CONCRETE  
CAN  
ACLCE10CC1



SINGLE CONTOUR  
EDGE 100  
INSTALLATION  
SLEEVE  
ACLCE10IS1



COMBINABLE  
CONTOUR EDGE  
100 INSTALLATION  
SLEEVE  
ACLCE10IS2



SINGLE CONTOUR  
EDGE 50  
CONCRETE CAN  
ACLCE50CC1



SINGLE CONTOUR  
EDGE 50  
INSTALLATION  
SLEEVE  
ACLCE50IS1



COMBINABLE  
CONTOUR EDGE  
50 INSTALLATION  
SLEEVE  
ACLCE50IS2



SINGLE CONTOUR  
EDGE 75  
CONCRETE CAN  
ACLCE75CC1



CONTOUR EDGE  
75 INSTALLATION  
SLEEVE  
ACLCE75IS1



COMBINABLE  
CONTOUR EDGE  
75 INSTALLATION  
SLEEVE  
ACLCE75IS2



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




CONTOUR EDGE 75 BLACK ANODISED  
LLCE7U161

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	ELLIPTICAL
BEAM ANGLE (°)	35° + 15°
LED SOURCE LUMENS (LM)	1683 lm
LUMINAIRE LUMENS (LM)	600 lm
INTENSITY RATING (CD)	2160
POWER CONSUMPTION (W)	18W
LUMINAIRE EFFICACY (LM/W)	33 lm/W
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	28.5V DC


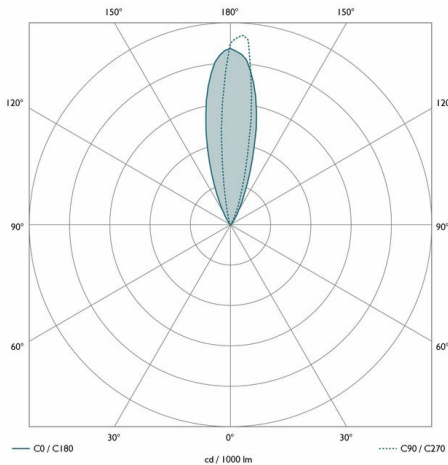


INGRESS RATING	IP67
IMPACT RATING	IK08
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012
	IEC/EN 60598-2-13:2006

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	>90
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
Cable Type	2 Core Silicone (180°C)
Cable Size	2 off 7/0.2 (0.22mm2)
Cable Length	2000 mm
Connector Type	N/A
Weight	N/A
Fire rated	N/A

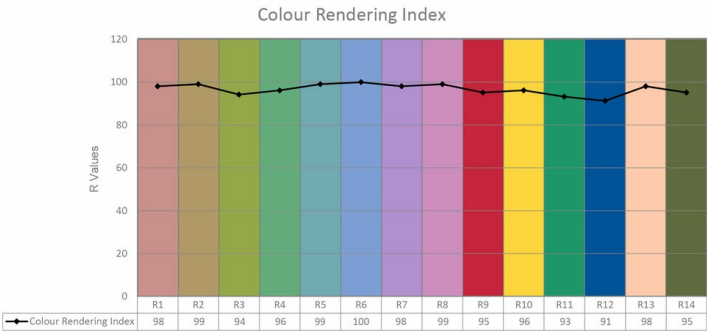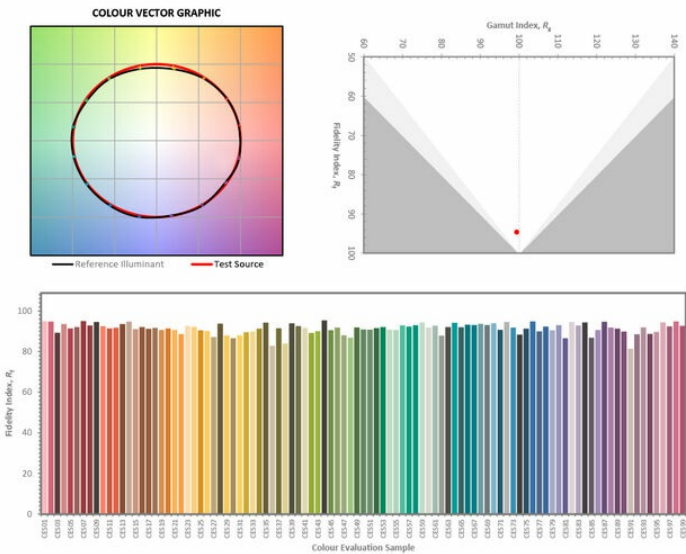

WWW.JOHN CULLEN LIGHTING.COM  
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81



PART L  
COMPLIANT