

LECCO TRIM BRONZE  
LOLETR061

LUMINAIRE REF:



PROJECT REF:




BRONZE

MINIATURE IP66 FLOOR WASHER

The Lecco is an energy efficient LED miniature floor washer. This low level floor washer is intended to be placed directly at ground level to create either a warm glow or, by removing the built in frosted diffuser, a striking accent light across the floor. Perfect for use in corridors, staircases and even wet rooms and exterior applications due to its IP66 rating. It is the perfect floor washer to add an extra layer of lighting to your scheme. Independently tested by LUX-TSI.

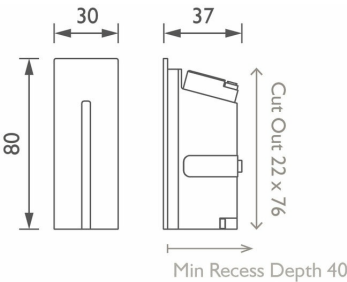

FLOOR WASH



FLOOR WASH

ACCESSORIES



CLEAR GLASS  
LECCO DIFFUSER  
C06LECC211



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




LECCO TRIM BRONZE  
LOLETR061

LUMINAIRE REF:

PROJECT REF:

| SPECIFICATION             | FLOOR WASH |
|---------------------------|------------|
| BEAM ANGLE (°)            | Floor Wash |
| LED SOURCE LUMENS (LM)    | 115 lm     |
| LUMINAIRE LUMENS (LM)     | 50 lm      |
| INTENSITY RATING (CD)     | 30         |
| POWER CONSUMPTION (W)     | 1.5W       |
| LUMINAIRE EFFICACY (LM/W) | 33.3 lm/W  |
| DRIVE CURRENT (mA)        | 500mA      |
| FORWARD VOLTAGE (V DC)    | 3V DC      |
|                           |            |
|                           |            |
|                           |            |


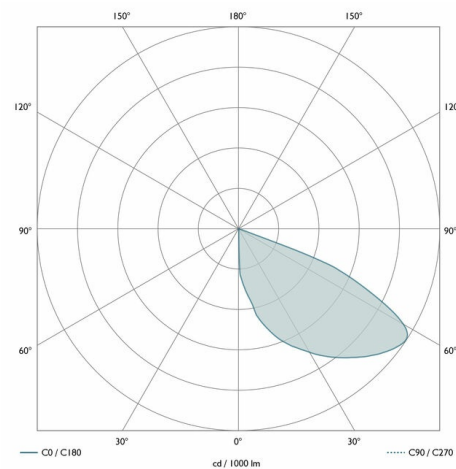


|                |                        |
|----------------|------------------------|
| INGRESS RATING | IP66                   |
| IMPACT RATING  | N/A                    |
| COMPLIANCE     | IEC/EN 60598-1:2015    |
|                | IEC/EN 60598-2-2:2012  |
|                | IEC/EN 60598-2-13:2006 |

|                                |                     |
|--------------------------------|---------------------|
| COLOUR TEMPERATURE             | 2700K               |
| CIE CRI AVAILABLE AS           | 90+ Ra              |
| IES TM-30 COLOUR FIDELITY (Rf) | >90                 |
| IES TM-30 COLOUR GAMUT (Rg)    | 95                  |
| BINNING                        | 2 SDCM (Equivalent) |
| LIFETIME L70/B10 (HOURS)       | >50000              |
| AMBIENT TEMPERATURE (Ta)       | -20 ... +40 °C      |

| ELECTRICAL       |                                    |
|------------------|------------------------------------|
| SOURCE TYPE      | LED                                |
| PRODUCT CLASS    | Class III (SELV low voltage)       |
| DIMMING PROTOCOL | DALI dimmable                      |
|                  | 1-10V dimmable                     |
|                  | Mains dimmable (phase cut dimming) |
|                  | Switched                           |

| OTHER DATA     |   |
|----------------|---|
| CABLE TYPE     | 2 x 2 Core PVC (Copper Core)                |
| CABLE SIZE     | 4mm OD - 2 off 7/0.2 (0.22mm <sup>2</sup> ) |
| CABLE LENGTH   | 350mm                                       |
| CONNECTOR TYPE | N/A   |
| WEIGHT         | N/A   |
| FIRE RATED     | N/A   |

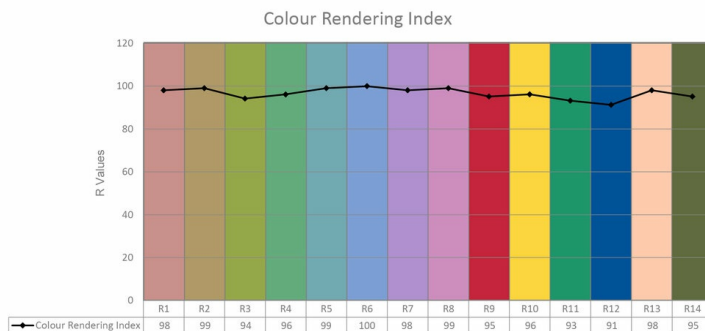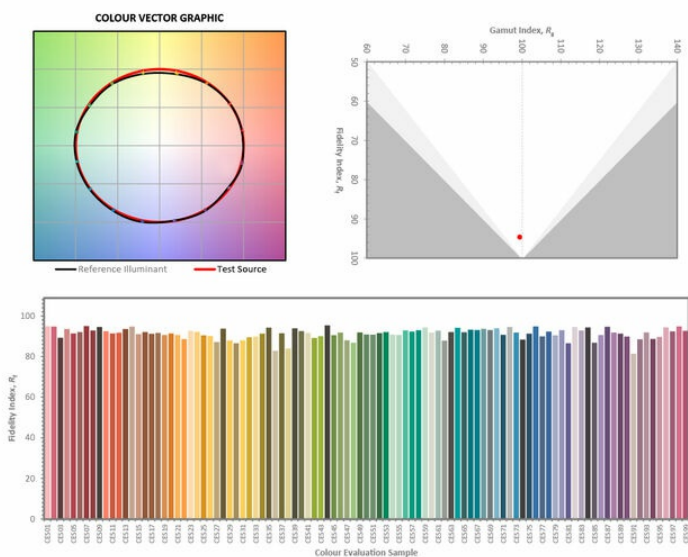

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East &amp; APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

PART L  
COMPLIANT