

LECCO TRIM STAINLESS STEEL

LOLETR171


LUMINAIRE REF:

PROJECT REF:



MINIATURE IP66 FLOOR WASHER

The Lecco is an energy efficient LED miniature floor washer. This low level floor washer is intended to be placed directly at ground level to create either a warm glow or, by removing the built in frosted diffuser, a striking accent light across the floor. Perfect for use in corridors, staircases and even wet rooms and exterior applications due to its IP66 rating. It is the perfect floor washer to add an extra layer of lighting to your scheme. Independently tested by LUX-TSI.







FLOOR WASH

FLOOR WASH

ACCESSORIES





WWW.JOHNCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81






LECCO TRIM STAINLESS STEEL

LOLETR171

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	FLOOR WASH
BEAM ANGLE (°)	Floor Wash
LED SOURCE LUMENS (LM)	115 lm
LUMINAIRE LUMENS (LM)	50 lm
INTENSITY RATING (CD)	30
POWER CONSUMPTION (W)	1.5W
LUMINAIRE EFFICACY (LM/W)	33.3 lm/W
DRIVE CURRENT (mA)	500mA
FORWARD VOLTAGE (V DC)	3V DC




30/04/2024 V1.130


INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012
	IEC/EN 60598-2-13:2006

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	90+ Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	95
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 +40 øC

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 x 2 Core PVC (Copper Core)
CABLE SIZE	4mm OD - 2 off 7/0.2 (0.22mm2)
CABLE LENGTH	350mm
CONNECTOR TYPE	N/A
WEIGHT	N/A
FIRE RATED	N/A

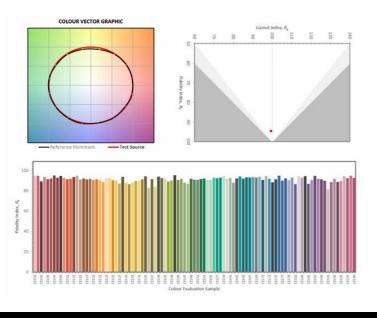

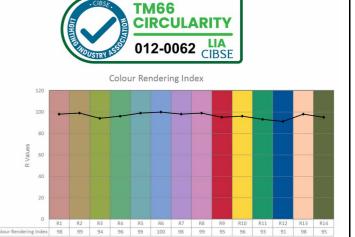



WWW.JOHNCULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

