

POLEFINITY PURE 50 WHITE SUPERWIDE
KPF5X01PU27SW

LUMINAIRE REF:



PROJECT REF:



WHITE RAL 9910

DIRECTIONAL TRUE TRIMLESS DOWNLIGHT

The Polefinity 50 is a true trimless low glare directional architectural downlight with a 360° rotation and 30° tilt mechanism. A 25mm extra deep black baffle allows for a low glare, minimal lighting solution. It comes with a contractor optimised frame for installing at first fix. The Polefinity 50 comes with four different LED engines: Pure 50, AmbiDim 50, True 50 and Tune 50. See the LED engines for full details. Technical details below for the Pure 50. The engine features a patented twist and lock LED engine mount for interchangeable components on site with no hand tools required and a tool less plug for connecting the LED driver.

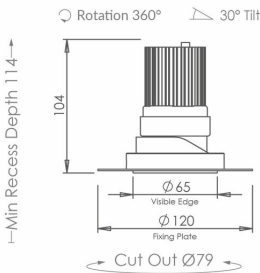

SUPERWIDE

ACCESSORIES

			
HONEYCOMB INSERT 50MM ACHC50MM1	SPREADER LENS 50MM ACLL50MM1	SANDBLASTED GLASS LENS 50MM ACSG50MM1	SOFTENING LENS 50MM ACSL50MM2



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




POLEFINITY PURE 50 WHITE SUPERWIDE
KPF5X01PU27SW

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	SUPERWIDE
BEAM ANGLE (°)	45°
LED SOURCE LUMENS (LM)	1344 lm
LUMINAIRE LUMENS (LM)	688 lm
INTENSITY RATING (CD)	1336
POWER CONSUMPTION (W)	12W
LUMINAIRE EFFICACY (LM/W)	60 lm/W
DRIVE CURRENT (mA)	350mA
FORWARD VOLTAGE (V DC)	36V DC


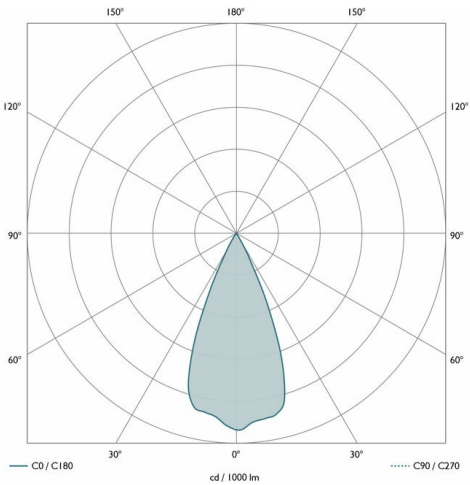


TM66	2.3 (LIA Assured Verification Score)
INGRESS RATING	IP54
IMPACT RATING	IK03
COMPLIANCE	IEC 60598-1:2014
	AMD1:2017
	IEC 60598-2-2:2011

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	95
IES TM-30 COLOUR GAMUT (Rg)	>98
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	300mm
CONNECTOR TYPE	OJ-602B
WEIGHT	N/A
FIRE RATED	Yes

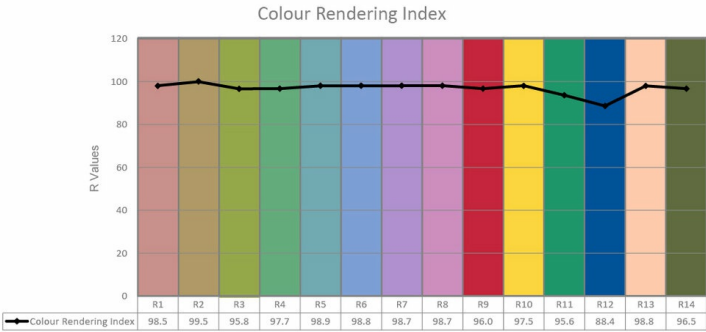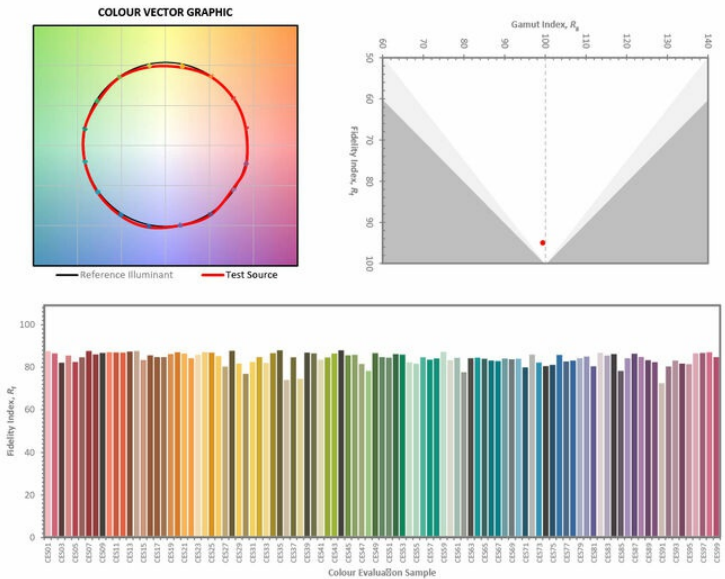

WWW.JOHN CULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

