



LUCCA 60 TRIMLESS
MIDI UPLIGHT FOR ARCHITECTURAL LIGHTING

LUMINAIRE REF:

PROJECT REF:

The Lucca 60 is an energy efficient trimless LED midi uplight. It is ideal for creating stunning uplighting effects to columns, arches, window reveals, walls and trees. Available in narrow, medium and wide distributions, with additional elliptical and asymmetric variants for wall grazing and wall washing. Trimless fittings come with a burial tube as standard.

It is IP67 rated so ideal for use both inside and out. If using inside, the warranty increases to 5 years. Fittings come with 1m of cable as standard. Custom cable lengths are available.

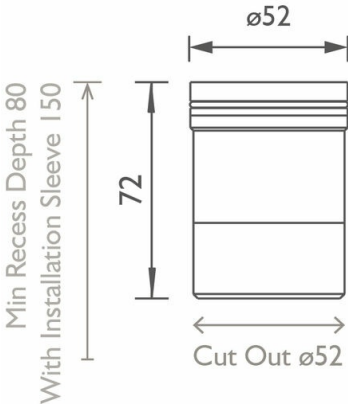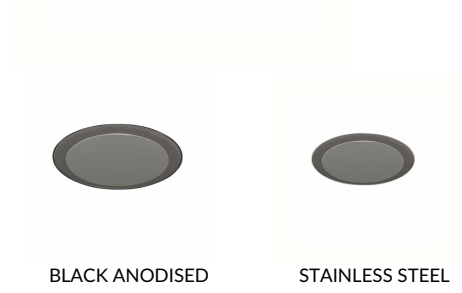

ACCESSORIES




LUCCA 60 TRIMLESS
MIDI UPLIGHT FOR ARCHITECTURAL LIGHTING

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	ASYMMETRIC	ELLIPTICAL	NARROW	MEDIUM	WIDE
BEAM ANGLE (°)	Asymmetric	Elliptical	13°	27°	36°
LED SOURCE LUMENS (LM)	516 lm	516 lm	516 lm	516 lm	516 lm
LUMINAIRE LUMENS (LM)	N/A	262 lm	345 lm	230 lm	127 lm
INTENSITY RATING (CD)	N/A	1021	5561	858	315
POWER CONSUMPTION (W)	6W	6W	6W	6W	6W
LUMINAIRE EFFICACY (LM/W)	N/A	44 lm/W	57.5 lm/W	38.3 lm/W	21.2 lm/W
DRIVE CURRENT (mA)	500mA	500mA	500mA	500mA	500mA
FORWARD VOLTAGE (V DC)	12V DC	12V DC	12V DC	12V DC	12V DC

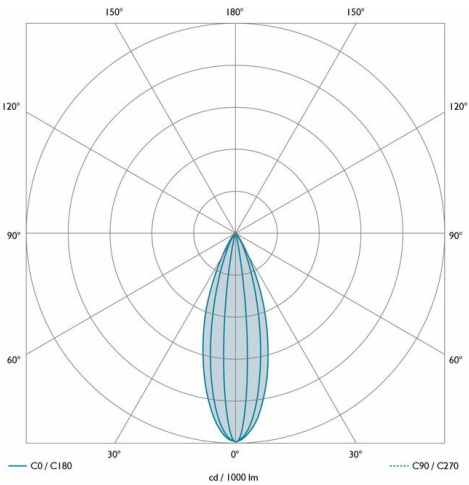


INGRESS RATING	IP67
IMPACT RATING	IK10
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012
	IEC/EN 60598-2-13:2006

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>90 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	>95
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	2 off 7/0.2 (0.22mm2)
CABLE LENGTH	1000mm
CONNECTOR TYPE	N/A
WEIGHT	N/A
FIRE RATED	N/A

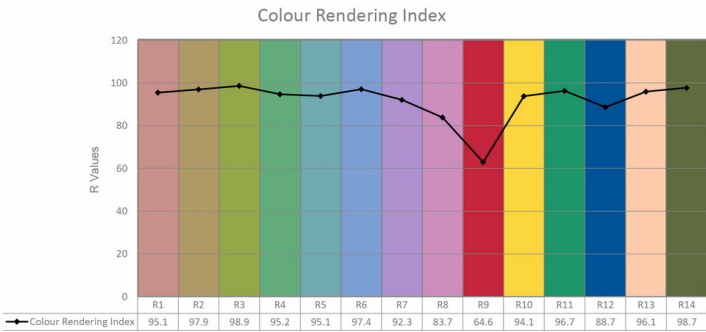

WWW.JOHN CULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

