

DARK SKY KEW 25

SPIKE MOUNTED SPOT TO MINIMISE LIGHT POLLUTION

LUMINAIRE REF:

PROJECT REF:



NEW



The Kew Dark Sky 25 is a spike mounted miniature exterior spotlight which only projects light downwards preventing upwards light spill that disrupts wildlife and contributes to light pollution. They come as a highly configurable kit of parts that are easy to assemble on site. The range is available in heights of up to 2.5m and in single, double or triple configurations. Multiple clusters can be created and require the use of braces at each joint to maintain structural integrity. Dark Sky Kew 25 is ideal for highlighting small landscape features such as foliage, shrubs and paths with a beam of directed light.



BLACK RAL 9005

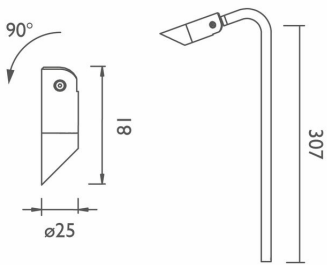

WIDE

ACCESSORIES



DARK SKY KEW
0.5M EXTENSION
TUBE BLACK
ACKD05M022



DARK SKY KEW
1M EXTENSION
TUBE BLACK
ACKD10M022



DARK SKY KEW
CORNER BRACE
BLACK
ACKDCB022



DARK SKY KEW
DOUBLE BRACE
BLACK
ACKDDB022



DARK SKY KEW
GROUND PLATE
BLACK
ACKDPLATE2



DARK SKY KEW
SPIKE EXTENSION
TUBE CLEAR
ANODISED
ACKDSPIEXT2



DARK SKY KEW
TRIPLE BRACE
BLACK
ACKDTB022




DARK SKY KEW 25

SPIKE MOUNTED SPOT TO MINIMISE LIGHT POLLUTION

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	WIDE
BEAM ANGLE (°)	34°
LED SOURCE LUMENS (LM)	135,4 lm
LUMINAIRE LUMENS (LM)	106 lm
INTENSITY RATING (CD)	267
POWER CONSUMPTION (W)	1.5W
LUMINAIRE EFFICACY (LM/W)	71 lm/W
DRIVE CURRENT (mA)	500 mA
FORWARD VOLTAGE (V DC)	3V DC

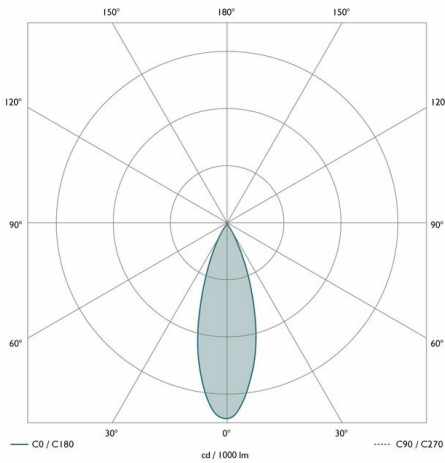

INGRESS RATING	IP66
IMPACT RATING	N/A
COMPLIANCE	BS EN IEC 60598-1: 2021
	EN 60598-1: 2015 + A1: 2018
	BS EN 60598-2-4: 2018

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>94 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	>90
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm ²)
CABLE LENGTH	5000mm
CONNECTOR TYPE	N/A
WEIGHT	70g
FIRE RATED	N/A

