

POLEFINITY IP65 PURE 40 WHITE SPOT 2700K

KPF401PU27SP652

LUMINAIRE REF:

PROJECT REF:





WHITE RAL 9003 TEXTURED

DIRECTIONAL TRUE TRIMLESS MINIATURE IP65 DOWNLIGHT

We have upgraded our Polefinity 40 IP65 mini true trimless directional architectural downlight for 2023. It retains the 360° rotation and 30° tilt mechanism for more precise positioning of the beam. To keep glare to a minimum, it has a 25mm extra deep black baffle to increase visual comfort. AS part of its modular design, we have introduced a "clip-fit" mechanic creating a more sustainable product. The luminaire is now IP54 as standard, with the option of an IP65 accessory. The standard white finish is a textured matt RAL9003. It comes with a contractor optimised frame for installing at first fix with no special tools required.

It comes as standard with the Pure 40 engine and a tool less plug for connecting the LED driver. NB: The cut-out of this product has increased to 71MM.



SPOT

ACCESSORIES



HONEYCOMB
INSERT 42MM
ACHC42MM1



SPREADER LENS
42MM
ACLL42MM1



SOFTENING LENS
42MM
ACSL42MM1



WWW.JOHN CULLEN LIGHTING.COM


UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

POLEFINITY IP65 PURE 40 WHITE SPOT 2700K
KPF401PU27SP652

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	SPOT
BEAM ANGLE (°)	8.5°
LED SOURCE LUMENS (LM)	486
LUMINAIRE LUMENS (LM)	210 lm
INTENSITY RATING (CD)	4432
POWER CONSUMPTION (W)	6.6
LUMINAIRE EFFICACY (LM/W)	23 lm/W
DRIVE CURRENT (mA)	350mA
FORWARD VOLTAGE (V DC)	18V DC


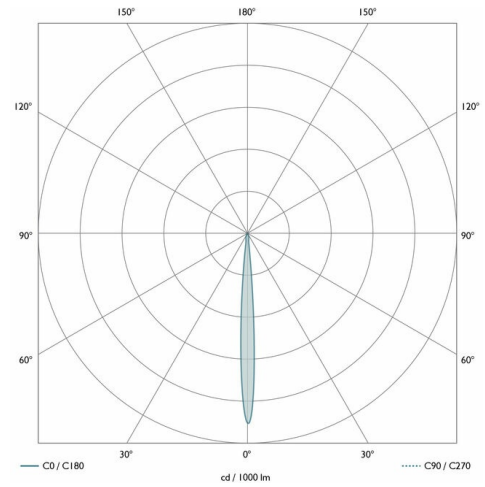


TM66	2.3 (LIA Assured Verification Score)
INGRESS RATING	IP65
IMPACT RATING	IK02
COMPLIANCE	IEC / BS EN 60598-1
	IEC / BS EN 60598-2-2

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>95 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>95
IES TM-30 COLOUR GAMUT (Rg)	>98
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	300mm
CONNECTOR TYPE	OJ-602B
WEIGHT	N/A
FIRE RATED	Yes

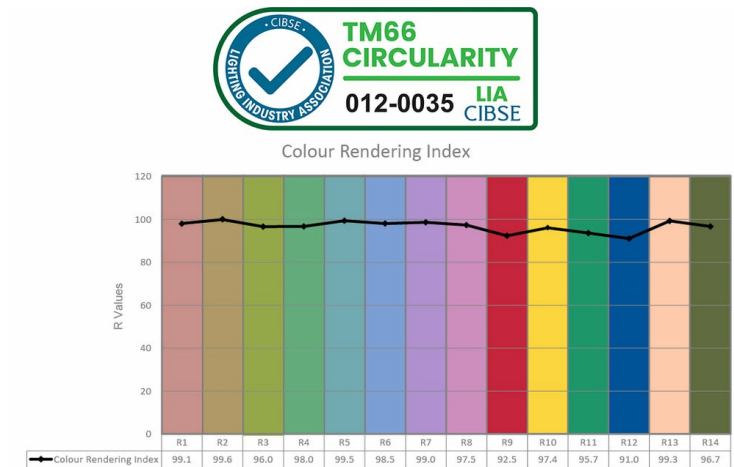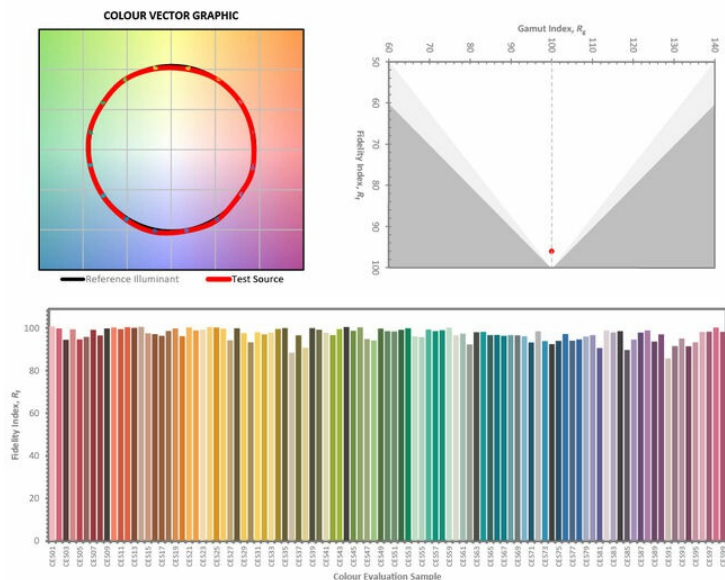

WWW.JOHN CULLEN LIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81