

VORSA DOT NARROW  
SLDSHN062

LUMINAIRE REF:

PROJECT REF:




BRONZE ANODISED

SEMI-RECESSED DIRECTIONAL MINI SPOTLIGHT

The Vorsa Dot is now available as a miniature fixed semi-recessed luminaire. It is ideal for spotlighting objects in shelving and joinery. Use a single or multiple products on both horizontal and vertical surfaces to light your objects precisely. With a choice of narrow, medium or wide beams, the Vorsa Dot allows your lighting to be as tailored as your display. Its ability to both rotate 360° and tilt 90° ensures flexibility even once installed. It delivers exceptional light quality from a miniature luminaire making it our most impactful and discreet product yet.

With a choice of narrow, medium or wide beams, the miniature Vorsa Dot allows your lighting to be as tailored as your display. Its ability to both rotate 360° and tilt 90° ensures flexibility even once installed.



NARROW




VORSA DOT NARROW  
SLDSHN062

LUMINAIRE REF:

PROJECT REF:

| SPECIFICATION             | NARROW  |
|---------------------------|---------|
| BEAM ANGLE (°)            | 19°     |
| LED SOURCE LUMENS (LM)    | 90 lm   |
| LUMINAIRE LUMENS (LM)     | 76 lm   |
| INTENSITY RATING (CD)     | 352     |
| POWER CONSUMPTION (W)     | 1 W     |
| LUMINAIRE EFFICACY (LM/W) | 76 lm/W |
| DRIVE CURRENT (mA)        | 350 mA  |
| FORWARD VOLTAGE (V DC)    | 2.7V Dc |
|                           |         |
|                           |         |
|                           |         |


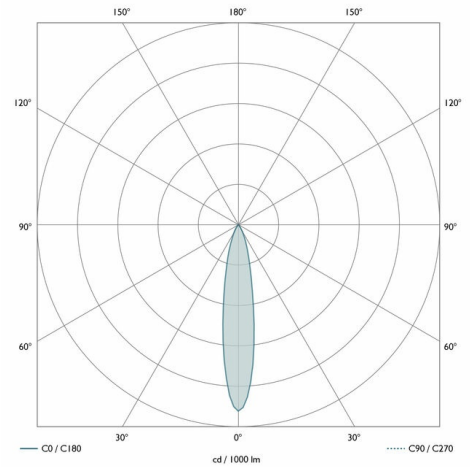


|                |                           |
|----------------|---------------------------|
| INGRESS RATING | IP20                      |
| IMPACT RATING  | IK02                      |
| COMPLIANCE     | BS EN IEC 60598-2-1: 2021 |
|                | BS EN IEC 60598-1: 2021   |

|                                |                     |
|--------------------------------|---------------------|
| COLOUR TEMPERATURE             | 2700K               |
| CIE CRI AVAILABLE AS           | 97 Ra               |
| IES TM-30 COLOUR FIDELITY (Rf) | N/A                 |
| IES TM-30 COLOUR GAMUT (Rg)    | N/A                 |
| BINNING                        | 2 SDCM (Equivalent) |
| LIFETIME L70/B10 (HOURS)       | >50000              |
| AMBIENT TEMPERATURE (Ta)       | -20 ... +35 °C      |

| ELECTRICAL       |                                    |
|------------------|------------------------------------|
| SOURCE TYPE      | LED                                |
| PRODUCT CLASS    | Class III (SELV low voltage)       |
| DIMMING PROTOCOL | 1-10V dimmable                     |
|                  | DALI dimmable                      |
|                  | Mains dimmable (phase cut dimming) |
|                  | Switched                           |

| OTHER DATA     |                                       |
|----------------|---------------------------------------|
| CABLE TYPE     | FEP Insulation Wire                   |
| CABLE SIZE     | 2 off 19/0.2 (0.41mm2) Copper Strands |
| CABLE LENGTH   | 800mm                                 |
| CONNECTOR TYPE | N/A                                   |
| WEIGHT         | N/A                                   |
| FIRE RATED     | N/A                                   |

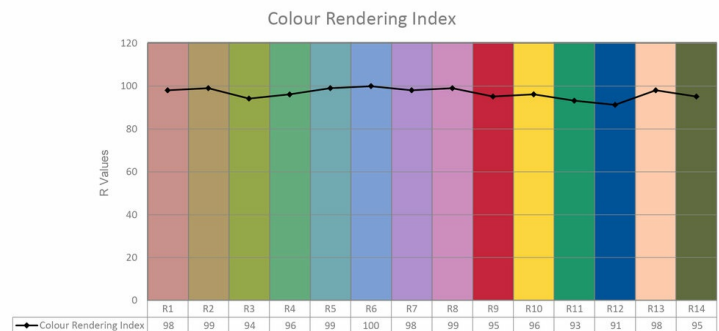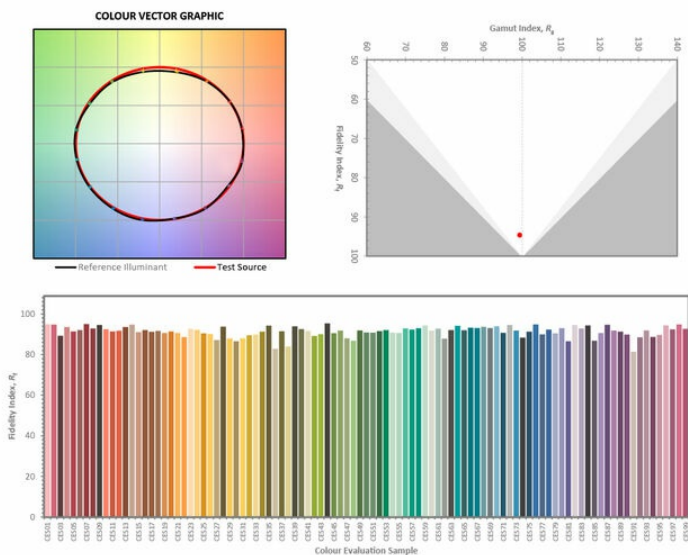

WWW.JOHN CULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East &amp; APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

PART L  
COMPLIANT