

ARINE PURE 30 MINI-TRIM ADJUSTABLE  
BLACK WIDE  
KAR3MTA9005WI

LUMINAIRE REF:



PROJECT REF:



BLACK RAL 9005

MINI-TRIM ADJUSTABLE BLACK WIDE 2700K

The Arine 30 Mini-Trim is a dedicated adjustable superyacht downlight. It has a precision engineered fixing mechanism - a rear fixing plate and frame, which allow positioning in different ceiling thicknesses of deckhead. The diameter of the fixing plate allows a leading full 30 degree tilt by preventing incursion from other ceiling elements. It comes with our dedicated LED 30 engine with high CRI and superior quality light output.

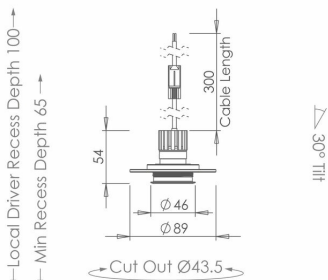

WIDE

ACCESSORIES

- 

HONEYCOMB  
INSERT 23MM  
ACHC23MM1
- 

SPREADER LENS  
23MM  
ACLL23MM1
- 

SANDBLASTED  
GLASS LENS 23MM  
ACSG23MM1
- 

SOFTENING LENS  
23MM  
ACSL23MM1




ARINE PURE 30 MINI-TRIM ADJUSTABLE  
BLACK WIDE

KAR3MTA9005WI

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	WIDE
BEAM ANGLE (°)	52°
LED SOURCE LUMENS (LM)	381
LUMINAIRE LUMENS (LM)	330
INTENSITY RATING (CD)	550
POWER CONSUMPTION (W)	4
LUMINAIRE EFFICACY (LM/W)	83
DRIVE CURRENT (mA)	350mA
FORWARD VOLTAGE (V DC)	11V DC

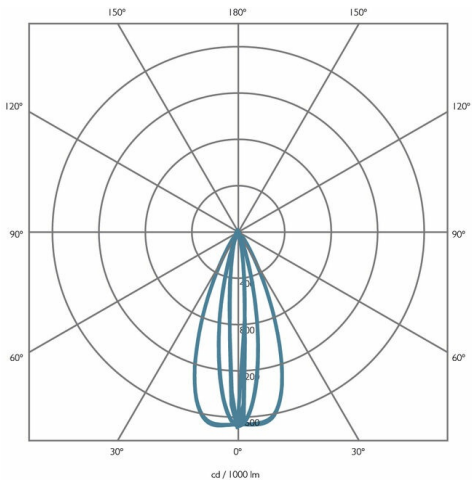

INGRESS RATING	IP54
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1
	IEC/EN 60598-2-2

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>90 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	>90
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (105°C)
CABLE SIZE	4.1mm OD - 2 off 17/0.15
CABLE LENGTH	300mm
CONNECTOR TYPE	OJ-602B
WEIGHT	N/A
FIRE RATED	N/A

