

POLESPRING PURE 30 SHELF LIGHT WHITE
MEDIUM
KPS30SL27ME9005

LUMINAIRE REF:

PROJECT REF:





WHITE RAL 9003 TEXTURED

WHITE MEDIUM DIRECTIONAL 2700K MICRO SHELF LIGHT

The Polespring 30 Shelf Light is a low glare miniature directional architectural downlight suitable for using in joinery. It has a tilt mechanism of 30 degrees and is suitable for both interior and marine applications. An extra deep black baffle and extra slim steel bezel allows for a low glare and minimal architectural lighting solutions. Ideal for lighting through glass shelving or to light individual shelves.

This product has been designed especially for shelf lighting with a trapezoidal spring for easy installation.

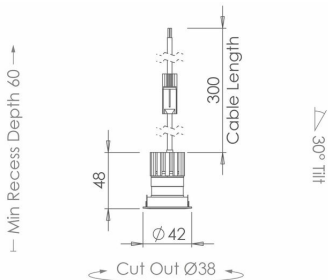

MEDIUM

ACCESSORIES



HONEYCOMB
INSERT 23MM
ACHC23MM1



SPREADER LENS
23MM
ACLL23MM1



SANDBLASTED
GLASS LENS 23MM
ACSG23MM1



SOFTENING LENS
23MM
ACSL23MM1



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81


POLESPRING PURE 30 SHELF LIGHT WHITE
MEDIUM

KPS30SL27ME9005

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	MEDIUM
BEAM ANGLE (°)	32°
LED SOURCE LUMENS (LM)	400
LUMINAIRE LUMENS (LM)	280
INTENSITY RATING (CD)	830
POWER CONSUMPTION (W)	3.9
LUMINAIRE EFFICACY (LM/W)	72
DRIVE CURRENT (mA)	350mA
FORWARD VOLTAGE (V DC)	11V DC

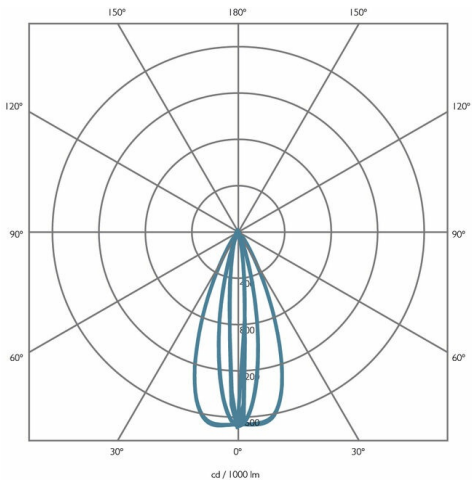

INGRESS RATING	IP20
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1
	IEC/EN 60598-2-2

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>90 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>90
IES TM-30 COLOUR GAMUT (Rg)	>90
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	2 Core Silicone (105°C)
CABLE SIZE	4.1mm OD - 2 off 17/0.15
CABLE LENGTH	300mm
CONNECTOR TYPE	OJ-602B
WEIGHT	N/A
FIRE RATED	Yes

