

SQUARE QUAD PURE 30 TRIMLESS BLACK  
NARROW  
KSQ30L27NA9005

LUMINAIRE REF:

PROJECT REF:





BLACK RAL 9005

QUAD ARCHITECTURAL DIRECTIONAL NARROW BLACK 2700K MICRO DOWNLIGHT

The Quad 30 LED downlight is a miniature light fitting set with four downlights. It uses an extra slim-line bezel with a deep dual black baffle system to help reduce glare. The Quad 30 LED downlight also features a unique concealed ceiling ring for easy lamp changing. It comes in trim and trimless versions to suit different interior looks. Each of the four LED engines can be tilted in different directions for greater flexibility.

This downlight is suitable for plasterboard ceilings and can tilt up to 30 degrees and rotate a full 360 degrees.

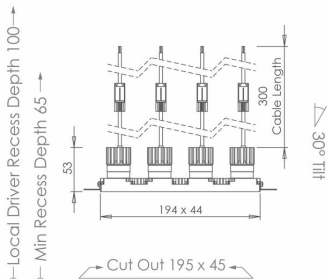

NARROW

ACCESSORIES

- 

HONEYCOMB  
INSERT 23MM  
ACHC23MM1
- 

SPREADER LENS  
23MM  
ACLL23MM1
- 

SANDBLASTED  
GLASS LENS 23MM  
ACSG23MM1
- 

SOFTENING LENS  
23MM  
ACSL23MM1




SQUARE QUAD PURE 30 TRIMLESS BLACK  
NARROW

KSQ30L27NA9005

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	NARROW
BEAM ANGLE (°)	11°
LED SOURCE LUMENS (LM)	688
LUMINAIRE LUMENS (LM)	584
INTENSITY RATING (CD)	10280
POWER CONSUMPTION (W)	8
LUMINAIRE EFFICACY (LM/W)	73
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	N/A

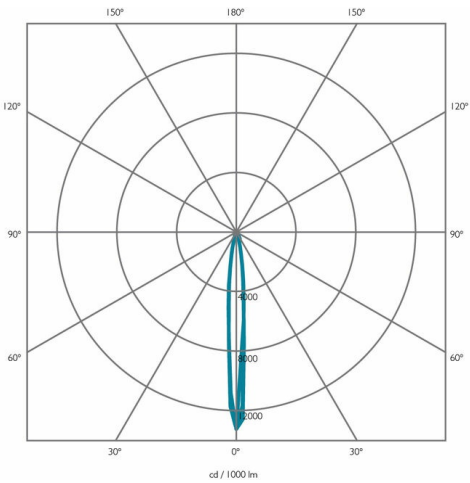

INGRESS RATING	IP20
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1
	IEC/EN 60598-2-2

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>95
IES TM-30 COLOUR GAMUT (Rg)	>95 Ra
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	FEP Insulation Wire
CABLE SIZE	2 off 7/0.2 (0.22mm2)
CABLE LENGTH	250mm
CONNECTOR TYPE	OJ-602B
WEIGHT	N/A
FIRE RATED	Yes

