

SQUARE DOUBLE TRIM BLACK IP54 SALE
DLDTR4023

LUMINAIRE REF:

PROJECT REF:

SALE





TWIN ARCHITECTURAL DIRECTIONAL NARROW BEAM BLACK DOWNLIGHT

Our Square Double Trim 50 LED downlight uses an extra slim-line bezel with a deep 25mm dual black baffle system to help reduce glare. The downlight is suitable for plasterboard ceilings and can tilt up to 35 degrees and rotate a full 360 degrees.

See range of 50 or 50+ engines in sale or pair with our Pure 50 LED engines not in the sale.

BLACK RAL 9005

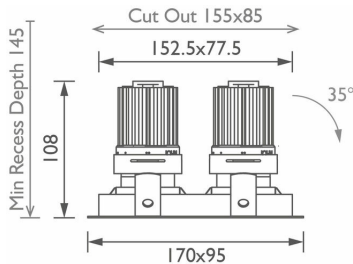

ACCESSORIES



INTUMESCENT
FIREHOOD LARGE
ACFHXXLA1



HONEYCOMB
INSERT 50MM
ACHC50MM1



SPREADER LENS
50MM
ACLL50MM1



SANDBLASTED
GLASS LENS 50MM
ACSG50MM1



SOFTENING LENS
50MM
ACSL50MM2


SQUARE DOUBLE TRIM BLACK IP54 SALE

DLDR4023

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	N/A
BEAM ANGLE (°)	22° x 2
LED SOURCE LUMENS (LM)	2688 lm
LUMINAIRE LUMENS (LM)	1494 lm
INTENSITY RATING (CD)	8237
POWER CONSUMPTION (W)	24W
LUMINAIRE EFFICACY (LM/W)	62 lm/W
DRIVE CURRENT (mA)	350 mA
FORWARD VOLTAGE (V DC)	72V DC


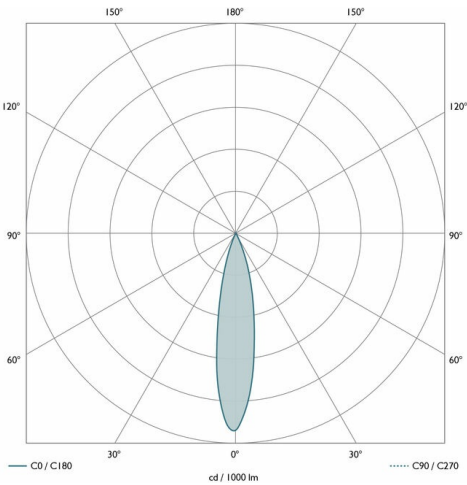


INGRESS RATING	IP20
IMPACT RATING	N/A
COMPLIANCE	

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	N/A
IES TM-30 COLOUR FIDELITY (Rf)	N/A
IES TM-30 COLOUR GAMUT (Rg)	N/A
BINNING	N/A
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +35 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI/Phase cut/1-10V

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 øC)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm ²)
CABLE LENGTH	350mm
CONNECTOR TYPE	OJ-602B
WEIGHT	N/A
FIRE RATED	Yes

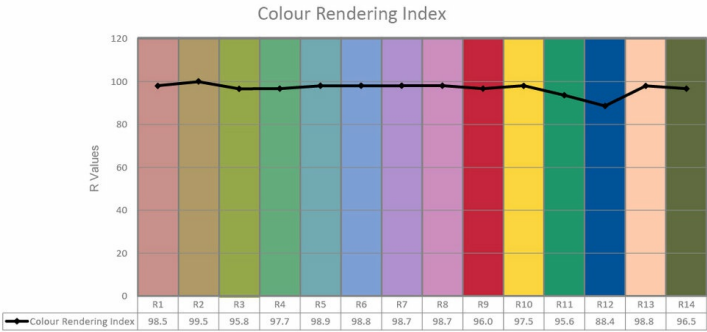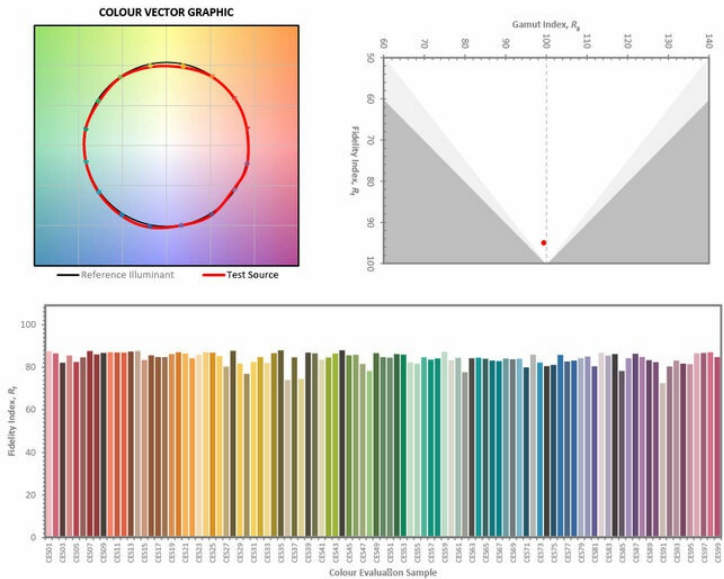

PART L
COMPLIANT