

AQUABEAM 50 SALE
DIRECTIONAL WATERPROOF DOWNLIGHT

LUMINAIRE REF:

PROJECT REF:

SALE



The Aquabeam 50 IP rated LED downlight is now discontinued as the Polespring 50 is now IP54 from front face as standard. We have a few remaining finishes - nickel and stainless steel in sale. Our Aquabeam Pure 50 IP rated LED downlight uses an extra slim-line bezel and has a deep 25mm black baffle to reduce glare. This fitting is waterproof which makes it suitable for wet areas such as bathrooms, shower rooms etc.

See all sale items for engines in the sale or it comes with our three different standard LED engines: Pure 50, AmbiDim 50, and Tune 50.

NB: Sale items come with a one year warranty.

SALE




NICKEL

SALE



STAINLESS STEEL

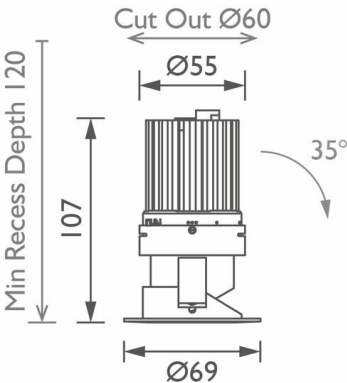

ACCESSORIES



POLESPRING 50
IP65 ACCESSORY
ACBPS5021



HONEYCOMB
INSERT 50MM
ACHC50MM1



HALOGEN
UPGRADE
DOWNLIGHT
ACCESSORY
WHITE
ACHUPS011



SPREADER LENS
50MM
ACLL50MM1



LATHE & PLASTER
CEILING RING
ACCESSORY
ACLPCRING



PLASTER-IN FLUSH
DOWNLIGHT
ACCESSORY
ACPIFLDL1



SANDBLASTED
GLASS LENS 50MM
ACSG50MM1



SOFTENING LENS
50MM
ACSL50MM2




AQUABEAM 50 SALE

DIRECTIONAL WATERPROOF DOWNLIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	
BEAM ANGLE (°)	N/A
LED SOURCE LUMENS (LM)	N/A
LUMINAIRE LUMENS (LM)	N/A
INTENSITY RATING (CD)	N/A
POWER CONSUMPTION (W)	12W
LUMINAIRE EFFICACY (LM/W)	N/A
DRIVE CURRENT (mA)	350 mA
FORWARD VOLTAGE (V DC)	36V DC

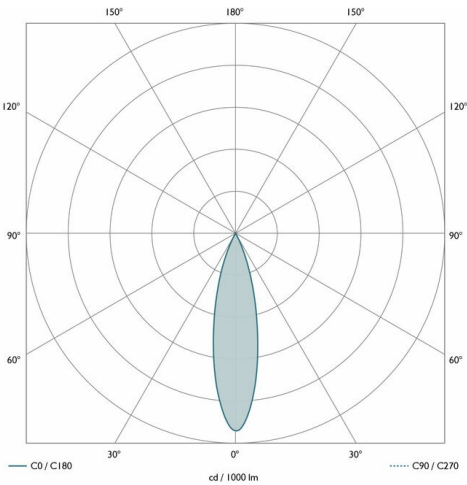

INGRESS RATING	IP65 (Front)/IP20 (Rear)
IMPACT RATING	N/A
COMPLIANCE	

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	95
IES TM-30 COLOUR GAMUT (Rg)	99.4
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +35 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI/Phase cut/1-10V

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 °C)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm ²)
CABLE LENGTH	350mm
CONNECTOR TYPE	OJ-602B
WEIGHT	N/A
FIRE RATED	Yes

