

WATERSPRING 40 BLACK SALE
FIXED TRIM WATERPROOF DOWNLIGHT

LUMINAIRE REF:

PROJECT REF:

SALE




The Black Waterspring 40 IP54 LED miniature downlight is an ideal bathroom and outdoor downlight (covered areas) with an extra slim-line bezel and a deep 25mm black baffle to reduce glare.

It now comes as standard with the new Pure 40 engine (not in sale) or can be paired with our 40 LED engines in the sale. NB: Sale items come with a one year warranty.

SALE



BLACK RAL 9005

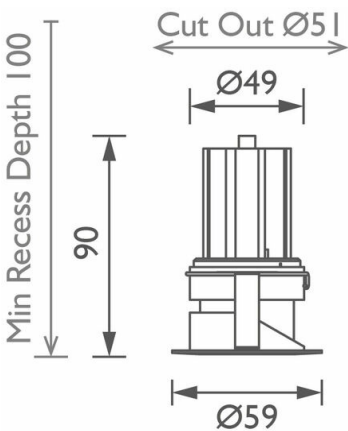

ACCESSORIES



HONEYCOMB
INSERT 42MM
ACHC42MM1



SPREADER LENS
42MM
ACLL42MM1



SANDBLASTED
GLASS LENS 42MM
ACSG42MM1



SOFTENING LENS
42MM
ACSL42MM1

WWW.JOHN CULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




WATERSPRING 40 BLACK SALE
FIXED TRIM WATERPROOF DOWNLIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	SPOT	NARROW	MEDIUM	WIDE	SUPERWIDE
BEAM ANGLE (°)	8.5°	10°	19°	30°	54°
LED SOURCE LUMENS (LM)	486	680	680	680	680
LUMINAIRE LUMENS (LM)	236 lm	357 lm	384 lm	416 lm	355 lm
INTENSITY RATING (CD)	5237	5273	2315	1383	370
POWER CONSUMPTION (W)	6.6	9	9	9	9
LUMINAIRE EFFICACY (LM/W)	36 lm/W	40 lm/W	43 lm/W	46 lm/W	39 lm/W
DRIVE CURRENT (mA)	350mA	500mA	500mA	500mA	500mA
FORWARD VOLTAGE (V DC)	18V DC	18V DC	18V DC	18V DC	18V DC

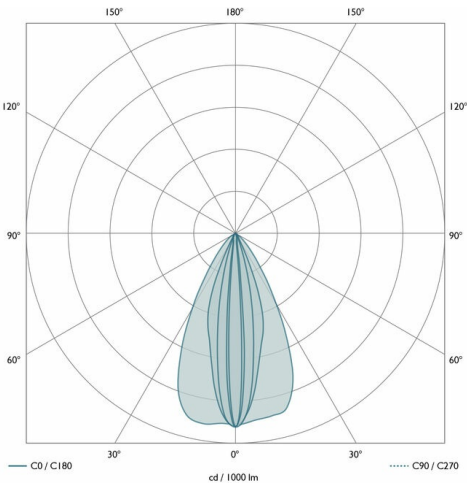

INGRESS RATING	IP54
IMPACT RATING	IK02
CONFORMITÉ	AMD1:2017
	IEC 60598-1:2014
	IEC 60598-2-2:2011

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>95 Ra
IES TM-30 COLOUR FIDELITY (Rf)	N/A
IES TM-30 COLOUR GAMUT (Rg)	>98
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
TYPE DE SOURCE	LED
CLASSE DU PRODUIT	Class III (SELV low voltage)
DIMMING PROTOCOL	1-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
Type de Câble	2 Core Silicone (180 °C)
Taille du Câble	6.4mm OD - 2 off 24/0.2 (0.75mm2)
Longueur du Câble	300mm
Type de Connecteur	OJ-602B
Poids	N/A
Résistant au feu	Yes

