

WATERSPRING 50 SALE

FIXED WATERPROOF DOWNLIGHT

LUMINAIRE REF:

PROJECT REF:

SALE



The Waterspring 50 IP rated LED downlight is now discontinued as the Polespring 50 is now IP54 from front face as standard. We have a few remaining finishes - white 9010, black, stainless and chrome on sale.

The Waterspring 50 is an ideal bathroom and outdoor downlight with an extra slim-line bezel with a deep 25mm black baffle to reduce glare.

See the sale category for engines in the sale or it comes with our three different standard LED engines: Pure 50, AmbiDim 50, and Tune 50. NB: Sale items come with a one year warranty.

SALE



BLACK

SALE




STAINLESS STEEL

SALE



RAL9010

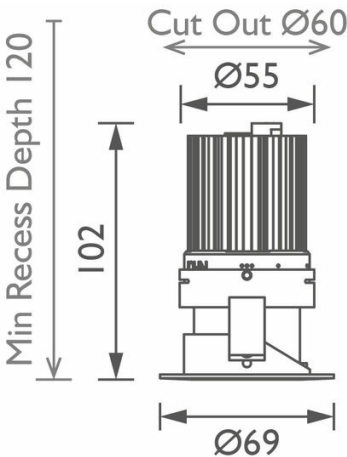

ACCESSORIES



HONEYCOMB  
INSERT 50MM  
ACHC50MM1



SPREADER LENS  
50MM  
ACLL50MM1



PLASTER-IN FLUSH  
DOWNLIGHT  
ACCESSORY  
ACPIFLDL1



SANDBLASTED  
GLASS LENS 50MM  
ACSG50MM1



SOFTENING LENS  
50MM  
ACSL50MM2




WATERSPRING 50 SALE

FIXED WATERPROOF DOWNLIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	
BEAM ANGLE (°)	N/A
LED SOURCE LUMENS (LM)	N/A
LUMINAIRE LUMENS (LM)	N/A
INTENSITY RATING (CD)	N/A
POWER CONSUMPTION (W)	12.8W
LUMINAIRE EFFICACY (LM/W)	N/A
DRIVE CURRENT (mA)	350mA
FORWARD VOLTAGE (V DC)	36V DC

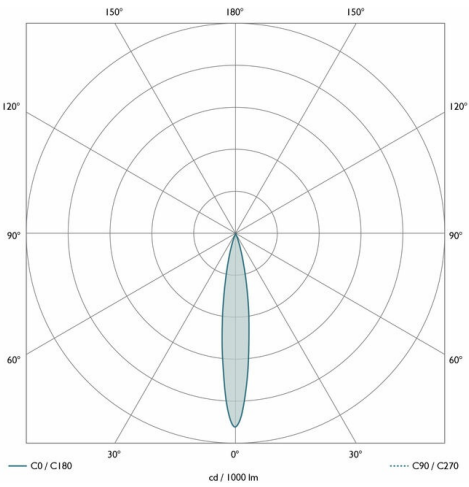

INGRESS RATING	IP65 (Front)/IP20 (Rear)
IMPACT RATING	IK02
COMPLIANCE	

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	95
IES TM-30 COLOUR GAMUT (Rg)	99.4
BINNING	2 SDCM
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +35 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI/Phase cut/1-10V

OTHER DATA	
CABLE TYPE	2 Core Silicone (180 øC)
CABLE SIZE	6.4mm OD - 2 off 24/0.2 (0.75mm2)
CABLE LENGTH	350mm
CONNECTOR TYPE	OJ-602B
WEIGHT	N/A
FIRE RATED	Yes

