

CAZALLA  
KSTLCZ27074

LUMINAIRE REF:

PROJECT REF:




BRIGHT CHROME

MINIATURE STEP BRIGHT CHROME LIGHT

The Cazalla is an energy efficient LED miniature steplight designed to provide low glare lighting to stair treads and corridors. It is a versatile product and can also be used upside down at a high level to become an uplight.

The Cazalla LED steplight is suitable for use indoor and outside or in wet areas.



FLOOR WASH

ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML



IP68 IN-LINE  
CONNECTION  
ACILIP68C



INSTALLATION  
SLEEVE  
ACISCAZA2



IP68 Y-JUNCTION  
CONNECTION  
ACYJBIP68




CAZALLA

KSTLCZ27074

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	FLOOR WASH
BEAM ANGLE (°)	Floor Wash
LED SOURCE LUMENS (LM)	187 lm
LUMINAIRE LUMENS (LM)	46 lm
INTENSITY RATING (CD)	26
POWER CONSUMPTION (W)	2W
LUMINAIRE EFFICACY (LM/W)	23 lm/W
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	2.8V DC


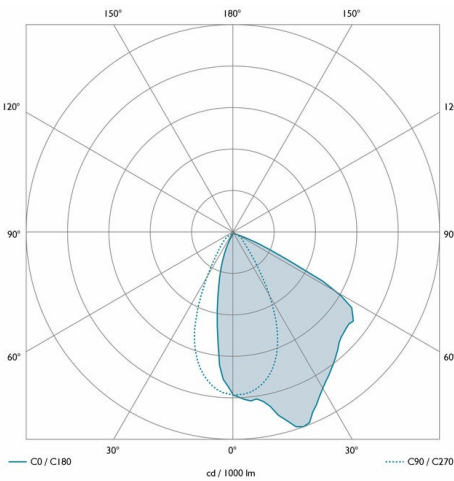


INGRESS RATING	IP66
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	95.8
IES TM-30 COLOUR GAMUT (Rg)	100.4
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
Cable Type	2 Core PVC (Copper Strands)
Cable Size	4mm OD - 2 off 7/0.2 (0.22mm2)
Cable Length	300mm
Connector Type	N/A
Weight	70g
Fire rated	N/A

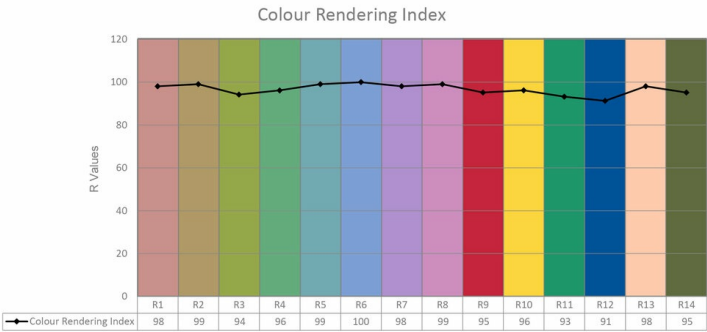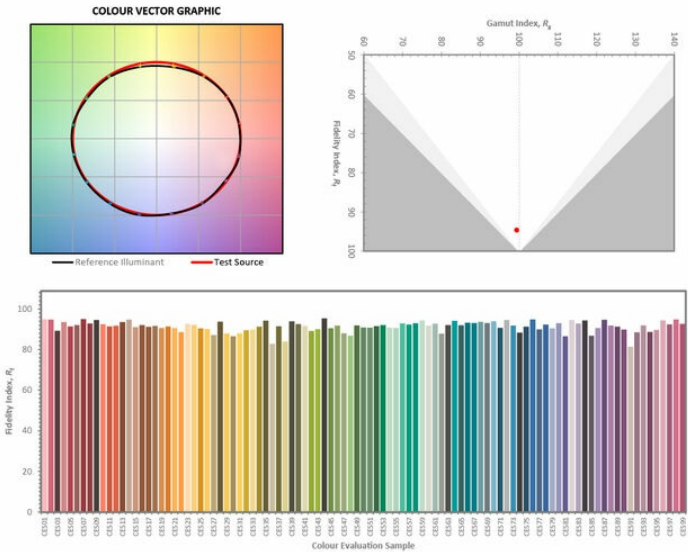

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

