

CAZALLA
KSTLCZ27024

LUMINAIRE REF:

PROJECT REF:




BLACK RAL 9005

MINIATURE STEP BLACK LIGHT

The Cazalla is an energy efficient LED miniature steplight designed to provide low glare lighting to stair treads and corridors. It is a versatile product and can also be used upside down at a high level to become an uplight.

The Cazalla LED steplight is suitable for use indoor and outside or in wet areas.



FLOOR WASH

ACCESSORIES



IP66 ENCLOSURE
FOR DRIVER
LARGE
ACENIPLRG



IP66 ENCLOSURE
FOR DRIVER
SMALL
ACENIPSML



IP68 IN-LINE
CONNECTION
ACILIP68C



INSTALLATION
SLEEVE
ACISCAZA2



IP68 Y-JUNCTION
CONNECTION
ACYJBIP68




CAZALLA
KSTLCZ27024

LUMINAIRE REF:

PROJECT REF:

| SPECIFICATION | FLOOR WASH |
|---------------------------|------------|
| BEAM ANGLE (°) | Floor Wash |
| LED SOURCE LUMENS (LM) | 187 lm |
| LUMINAIRE LUMENS (LM) | 46 lm |
| INTENSITY RATING (CD) | 26 |
| POWER CONSUMPTION (W) | 2W |
| LUMINAIRE EFFICACY (LM/W) | 23 lm/W |
| DRIVE CURRENT (mA) | 700mA |
| FORWARD VOLTAGE (V DC) | 2.8V DC |
| | |
| | |
| | |


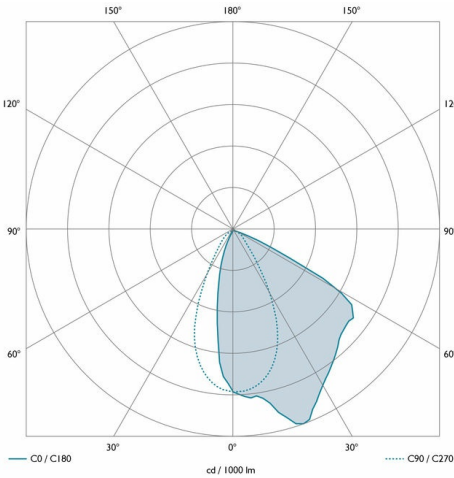


| | |
|----------------|-----------------------|
| INGRESS RATING | IP66 |
| IMPACT RATING | IK03 |
| COMPLIANCE | IEC/EN 60598-1:2015 |
| | IEC/EN 60598-2-2:2012 |

| | |
|--------------------------------|---------------------|
| COLOUR TEMPERATURE | 2700K |
| CIE CRI AVAILABLE AS | 98 Ra |
| IES TM-30 COLOUR FIDELITY (Rf) | 95.8 |
| IES TM-30 COLOUR GAMUT (Rg) | 100.4 |
| BINNING | 2 SDCM (Equivalent) |
| LIFETIME L70/B10 (HOURS) | >50000 |
| AMBIENT TEMPERATURE (Ta) | -20 ... +40 °C |

| ELECTRICAL | |
|------------------|------------------------------------|
| SOURCE TYPE | LED |
| PRODUCT CLASS | Class III (SELV low voltage) |
| DIMMING PROTOCOL | DALI dimmable |
| | 1-10V dimmable |
| | Mains dimmable (phase cut dimming) |
| | Switched |

| OTHER DATA | |
|----------------|--------------------------------|
| Cable Type | 2 Core PVC (Copper Strands) |
| Cable Size | 4mm OD - 2 off 7/0.2 (0.22mm2) |
| Cable Length | 300mm |
| Connector Type | N/A |
| Weight | 70g |
| Fire rated | N/A |

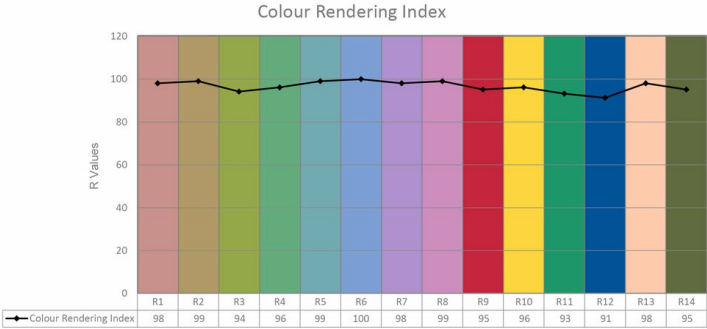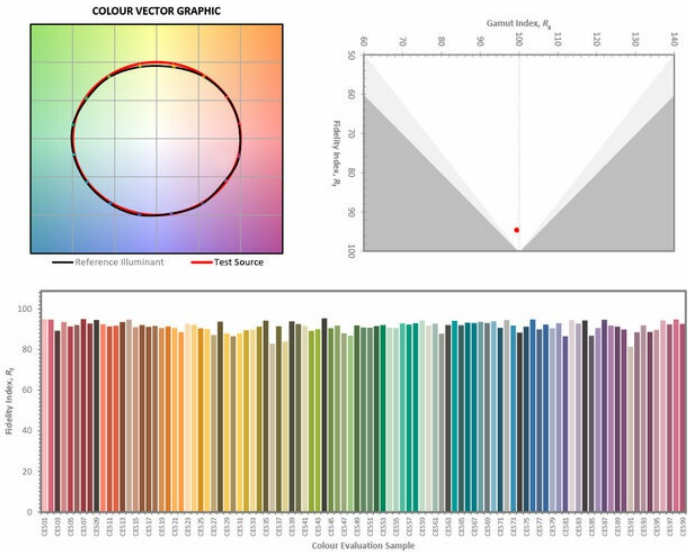

WWW.JOHN CULLEN LIGHTING.COM
UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

