

CAZALLA

KSTLCZ27174

LUMINAIRE REF:

PROJECT REF:





STAINLESS STEEL

MINIATURE STEP STAINLESS STEEL LIGHT

The Cazalla is an energy efficient LED miniature steplight designed to provide low glare lighting to stair treads and corridors. It is a versatile product and can also be used upside down at a high level to become an uplight.

This stainless steel Cazalla LED steplight is suitable for use indoor. Use KSTLCZ27173 for use outside or in wet areas.

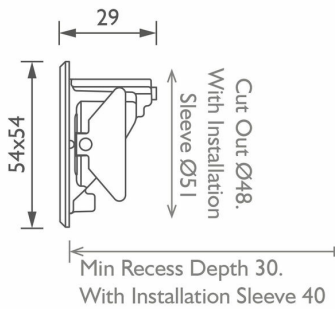

FLOOR WASH

ACCESSORIES

- 

IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG
- 

IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML
- 

IP68 IN-LINE  
CONNECTION  
ACILIP68C
- 

INSTALLATION  
SLEEVE  
ACISCAZA2
- 

IP68 Y-JUNCTION  
CONNECTION  
ACYJBIP68




CAZALLA  
KSTLCZ27174

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	FLOOR WASH
BEAM ANGLE (°)	Floor Wash
LED SOURCE LUMENS (LM)	187 lm
LUMINAIRE LUMENS (LM)	46 lm
INTENSITY RATING (CD)	26
POWER CONSUMPTION (W)	2W
LUMINAIRE EFFICACY (LM/W)	23 lm/W
DRIVE CURRENT (mA)	700mA
FORWARD VOLTAGE (V DC)	2.8V DC


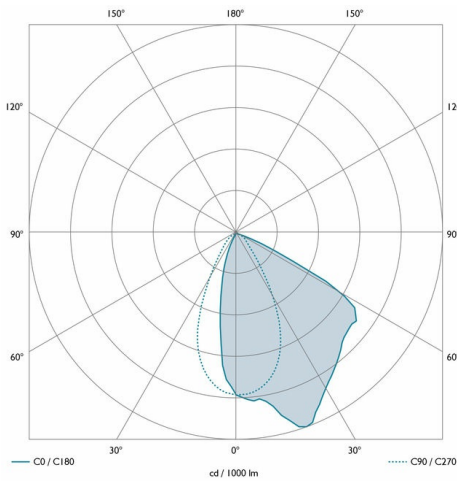


INGRESS RATING	IP66
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1:2015
	IEC/EN 60598-2-2:2012

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	98 Ra
IES TM-30 COLOUR FIDELITY (Rf)	95.8
IES TM-30 COLOUR GAMUT (Rg)	100.4
BINNING	2 SDCM (Equivalent)
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +40 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	1-10V dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
Cable Type	2 Core PVC (Copper Strands)
Cable Size	4mm OD - 2 off 7/0.2 (0.22mm2)
Cable Length	300mm
Connector Type	N/A
Weight	70g
Fire rated	N/A

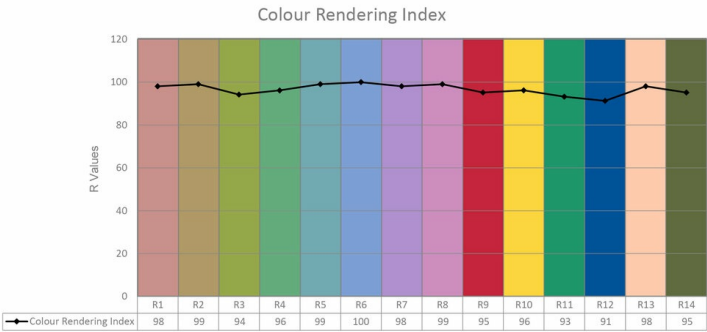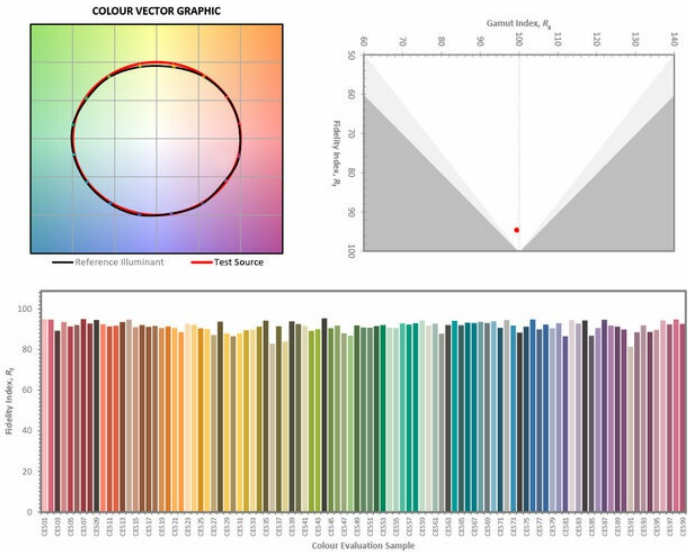

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

