

VORSA TRACK 40 2024
TRACK MOUNTED DIRECTIONAL MINI SPOTLIGHT

LUMINAIRE REF:

PROJECT REF:



The updated Vorsa Track 40 is a versatile mini "click and fit" track-mounted directional spotlight. It has been re-engineered for 2024 with a cleaner aesthetic, an increased light output and an industry-leading light output at 98 CRI. Interchangeable optics allow for a range of beam distributions, all easy to fit on-site. Its track architecture facilitates easy changing between different size Vorsa heads when commissioning a scheme. We have introduced a new innovative screwless self-supporting tilt mechanism. This fitting is ideal for use in areas of key areas of the home and is perfect for use on beams and concrete ceilings where recessed fittings are unsuitable. The Vorsa Track 40 can be used on a range of Stucchi track systems including recessed, surface mounted and suspended. Please ask for full details. The range has been built to the principles of the circular economy to not only maximise resources but also to reduce waste and environmental impact.




BLACK RAL 9005



WHITE RAL 9003


Rotation 355° 90° Tilt

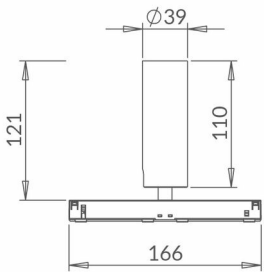


SPOT



NARROW



MEDIUM



WIDE

ACCESSORIES



VORSA 40
HONEYCOMB
INSERT Ø33MM X
3MM
ACHCVO402



VORSA 40 SAND
BLASTED GLASS
INSERT Ø33MM X
3MM
ACSGVO402



VORSA 40 HIGH
TRANSMISSION
SOFTENING GLASS
INSERT Ø33MM X
3MM
ACSLVO402



VORSA STANDARD
EVO TRACK
WHITE - 1M/2M
SLVTF1012/2012



VORSA STANDARD
EVO TRACK BLACK
- 1M/2M
SLVTF1022/2022



VORSA RECESSED
EVO TRACK BLACK
- 1M/2M
SLVTR1022/2022



VORSA
SUSPENDED
TRACK WHITE -
1M/2M
SLVTW1012/2012



VORSA
SUSPENDED
TRACK BLACK -
1M/2M
SLVTW1022/2022



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




VORSA TRACK 40 2024

TRACK MOUNTED DIRECTIONAL MINI SPOTLIGHT

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	SPOT	NARROW	MEDIUM	WIDE	SUPER WIDE
BEAM ANGLE (°)	9°	11°	23°	33°	53°
LED SOURCE LUMENS (LM)	486	680	680	680	680
LUMINAIRE LUMENS (LM)	225	370	440	480	470
INTENSITY RATING (CD)	3990	4800	4265	1430	650
POWER CONSUMPTION (W)	6	9	9	9	9
LUMINAIRE EFFICACY (LM/W)	38	41	49	53	52
DRIVE CURRENT (mA)	N/A	N/A	N/A	N/A	N/A
FORWARD VOLTAGE (V DC)	N/A	N/A	N/A	N/A	N/A

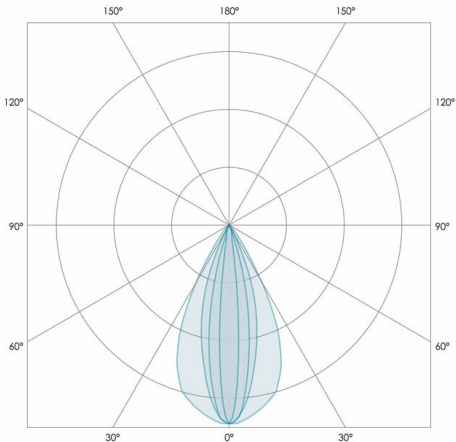

TM66	2.3 (LIA Assured Verification Score)
INGRESS RATING	IP20
IMPACT RATING	IK03
COMPLIANCE	IEC 60598-1:2020
	IEC 60598-2-1:2020

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>95 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>95
IES TM-30 COLOUR GAMUT (Rg)	≈100
BINNING	2-step
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	DALI dimmable
	Switched
	0-10V dimmable

OTHER DATA	
CABLE TYPE	FEP (200 °C)
CABLE SIZE	N/A
CABLE LENGTH	N/A
CONNECTOR TYPE	Track Adapter
WEIGHT	250
FIRE RATED	N/A

