

VORSA PORT 50 NARROW WHITE 2024
SLVP5N015


LUMINAIRE REF:

PROJECT REF:



WHITE RAL 9003

The new Vorsa Port 50 spotlight has been re-imagined as a simplified plaster-in spotlight. It has been re-engineered for 2024 with a cleaner aesthetic, an increased light output and an industry-leading light output at 98 CRI. Interchangeable optics allow for a range of beam distributions, all easy to fit on-site. We have introduced a new innovative screwless self-supporting tilt mechanism. It comes complete with recyclable cardboard protection shield for first fix installation. The range has been built to the principles of the circular economy to not only maximise resources but also to reduce waste and environmental impact.



NARROW

ACCESSORIES



VORSA 50
HONEYCOMB
INSERT Ø48MM X
3MM
ACHCVO502



VORSA 50 SAND
BLASTED GLASS
INSERT Ø48MM X
3MM
ACSGVO502



VORSA 50 HIGH
TRANSMISSION
SOFTENING GLASS
INSERT Ø48MM X
3MM
ACSLVO502



VORSA PORT
PLASTER IN
FRAME WHITE RAL
9003
SLVPXX015-Frame



VORSA PORT
PLASTER IN
FRAME BLACK RAL
9003
SLVPXX025-Frame



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




VORSA PORT 50 NARROW WHITE 2024

SLVP5N015

LUMINAIRE REF:

PROJECT REF:

| SPECIFICATION | NARROW |
|---------------------------|--------|
| BEAM ANGLE (°) | 19° |
| LED SOURCE LUMENS (LM) | 1290 |
| LUMINAIRE LUMENS (LM) | 990 |
| INTENSITY RATING (CD) | 6330 |
| POWER CONSUMPTION (W) | 12 |
| LUMINAIRE EFFICACY (LM/W) | 83 |
| DRIVE CURRENT (mA) | 350 |
| FORWARD VOLTAGE (V DC) | 37 |
| | |
| | |
| | |

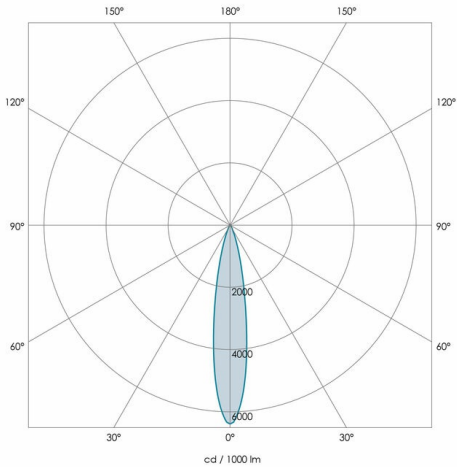

| | |
|----------------|--------------------------------------|
| TM66 | 2.3 (LIA Assured Verification Score) |
| INGRESS RATING | IP20 |
| IMPACT RATING | IK03 |
| COMPLIANCE | IEC/EN 60598-1:2021 |
| | IEC 60598-2-2:2011 |

| | |
|--------------------------------|----------------|
| COLOUR TEMPERATURE | 2700K |
| CIE CRI AVAILABLE AS | >95 Ra |
| IES TM-30 COLOUR FIDELITY (Rf) | >95 |
| IES TM-30 COLOUR GAMUT (Rg) | ≈100 |
| BINNING | 2-step |
| LIFETIME L70/B10 (HOURS) | >50000 |
| AMBIENT TEMPERATURE (Ta) | -20 ... +25 °C |

| ELECTRICAL | |
|------------------|------------------------------------|
| SOURCE TYPE | LED |
| PRODUCT CLASS | Class III (SELV low voltage) |
| DIMMING PROTOCOL | 0-10V dimmable |
| | DALI dimmable |
| | Mains dimmable (phase cut dimming) |
| | Switched |

| OTHER DATA | |
|----------------|-------------------------------|
| CABLE TYPE | FEP (200 °C) |
| CABLE SIZE | 2 off 22AWG 19/0.15 (0.15mm2) |
| CABLE LENGTH | 150 |
| CONNECTOR TYPE | Leads included |
| WEIGHT | 440 |
| FIRE RATED | N/A |

