

VORSA PORT 50 SUPER WIDE BLACK 2024  
SLVP5SW025


LUMINAIRE REF:

PROJECT REF:



BLACK RAL 9005

The new Vorsa Port 50 spotlight has been re-imagined as a simplified plaster-in spotlight. It has been re-engineered for 2024 with a cleaner aesthetic, an increased light output and an industry-leading light output at 98 CRI. Interchangeable optics allow for a range of beam distributions, all easy to fit on-site. We have introduced a new innovative screwless self-supporting tilt mechanism. It comes complete with recyclable cardboard protection shield for first fix installation. The range has been built to the principles of the circular economy to not only maximise resources but also to reduce waste and environmental impact.



SUPER WIDE

ACCESSORIES

- 

VORSA 50  
HONEYCOMB  
INSERT Ø48MM X  
3MM  
ACHCVO502
- 

VORSA 50 SAND  
BLASTED GLASS  
INSERT Ø48MM X  
3MM  
ACSGVO502
- 

VORSA 50 HIGH  
TRANSMISSION  
SOFTENING GLASS  
INSERT Ø48MM X  
3MM  
ACSLVO502
- 

VORSA PORT  
PLASTER IN  
FRAME WHITE RAL  
9003  
SLVPXX015-Frame
- 

VORSA PORT  
PLASTER IN  
FRAME BLACK RAL  
9003  
SLVPXX025-Frame




VORSA PORT 50 SUPER WIDE BLACK 2024  
SLVP5SW025

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	SUPER WIDE
BEAM ANGLE (°)	50°
LED SOURCE LUMENS (LM)	1290
LUMINAIRE LUMENS (LM)	780
INTENSITY RATING (CD)	1310
POWER CONSUMPTION (W)	12
LUMINAIRE EFFICACY (LM/W)	65
DRIVE CURRENT (mA)	350
FORWARD VOLTAGE (V DC)	37




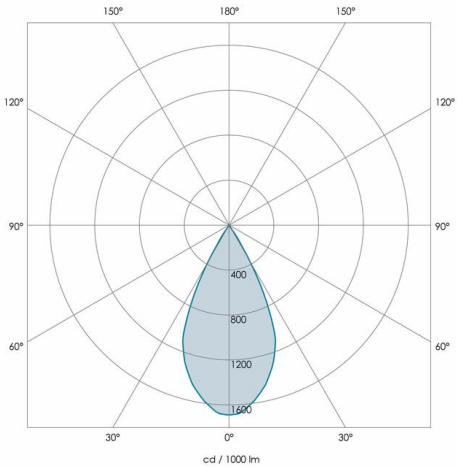


TM66	2.3 (LIA Assured Verification Score)
INGRESS RATING	IP20
IMPACT RATING	IK03
COMPLIANCE	IEC/EN 60598-1:2021
	IEC 60598-2-2:2011

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>95 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>95
IES TM-30 COLOUR GAMUT (Rg)	≈100
BINNING	2-step
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	0-10V dimmable
	DALI dimmable
	Mains dimmable (phase cut dimming)
	Switched

OTHER DATA	
CABLE TYPE	FEP (200 °C)
CABLE SIZE	2 off 22AWG 19/0.15 (0.15mm2)
CABLE LENGTH	150
CONNECTOR TYPE	Leads included
WEIGHT	440
FIRE RATED	N/A

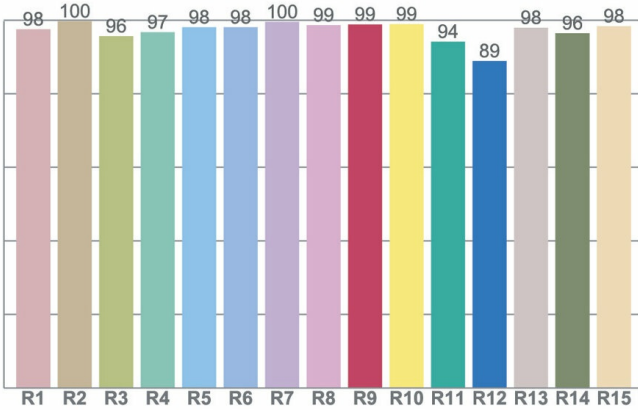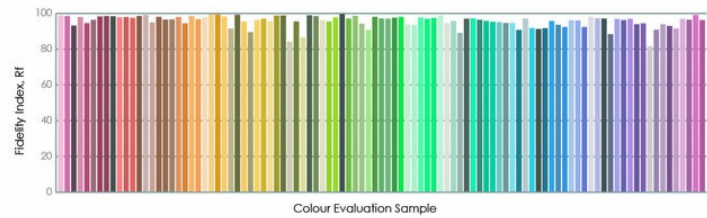

WWW.JOHN CULLENLIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

