

VORSA TRACK 50 MEDIUM WHITE 0-10V 2024
SLVT5M015AN2

LUMINAIRE REF:


PROJECT REF:



WHITE RAL 9003

The updated Vorsa Track 50 is a versatile "click and fit" track mounted directional spotlight. It has been re-engineered for 2024 with a cleaner aesthetic, an increased light output and an industry-leading light output at 98 CRI. Interchangeable optics allow for a range of beam distributions, all easy to fit on-site. Its track architecture facilitates easy changing between different size Vorsa heads when commissioning a scheme. We have introduced a new innovative screwless self-supporting tilt mechanism. This fitting is ideal for use in areas of key areas of the home and is perfect for use on beams and concrete ceilings where recessed fittings are unsuitable. The Vorsa Track 50 can be used on a range of Stucchi track systems including recessed, surface mounted and suspended. Please ask for full details. The range has been built to the principles of the circular economy to not only maximise resources but also to reduce waste and environmental impact.

Rotation 355° 190° Tilt



MEDIUM

ACCESSORIES



VORSA 50
HONEYCOMB
INSERT Ø48MM X
3MM
ACHCVO502



VORSA 50 SAND
BLASTED GLASS
INSERT Ø48MM X
3MM
ACSGVO502



VORSA 50 HIGH
TRANSMISSION
SOFTENING GLASS
INSERT Ø48MM X
3MM
ACSLVO502



VORSA STANDARD
EVO TRACK
WHITE - 1M/2M
SLVTF1012/2012



VORSA STANDARD
EVO TRACK BLACK
- 1M/2M
SLVTF1022/2022



VORSA RECESSED
EVO TRACK BLACK
- 1M/2M
SLVTR1022/2022



VORSA
SUSPENDED
TRACK WHITE -
1M/2M
SLVTW1012/2012



VORSA
SUSPENDED
TRACK BLACK -
1M/2M
SLVTW1022/2022



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




VORSA TRACK 50 MEDIUM WHITE 0-10V 2024
SLVT5M015AN2

LUMINAIRE REF:

PROJECT REF:

SPECIFICATION	MEDIUM
BEAM ANGLE (°)	26°
LED SOURCE LUMENS (LM)	1290
LUMINAIRE LUMENS (LM)	920
INTENSITY RATING (CD)	3645
POWER CONSUMPTION (W)	12
LUMINAIRE EFFICACY (LM/W)	77
DRIVE CURRENT (mA)	N/A
FORWARD VOLTAGE (V DC)	N/A


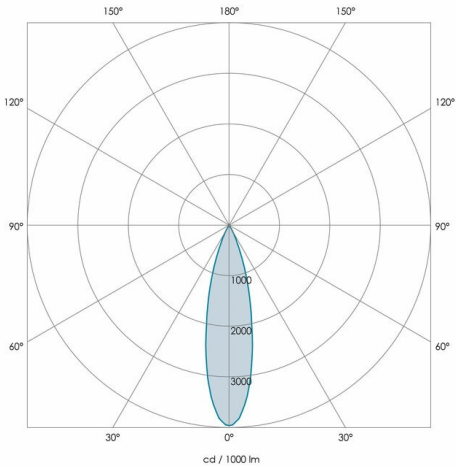


TM66	2.3 (LIA Assured Verification Score)
INGRESS RATING	IP20
IMPACT RATING	IK03
COMPLIANCE	IEC 60598-1:2020
	IEC 60598-2-1:2020

COLOUR TEMPERATURE	2700K
CIE CRI AVAILABLE AS	>95 Ra
IES TM-30 COLOUR FIDELITY (Rf)	>95
IES TM-30 COLOUR GAMUT (Rg)	≈100
BINNING	2-step
LIFETIME L70/B10 (HOURS)	>50000
AMBIENT TEMPERATURE (Ta)	-20 ... +25 °C

ELECTRICAL	
SOURCE TYPE	LED
PRODUCT CLASS	Class III (SELV low voltage)
DIMMING PROTOCOL	0-10V dimmable

OTHER DATA	
CABLE TYPE	FEP (200 °C)
CABLE SIZE	N/A
CABLE LENGTH	N/A
CONNECTOR TYPE	Track Adapter
WEIGHT	375
FIRE RATED	N/A

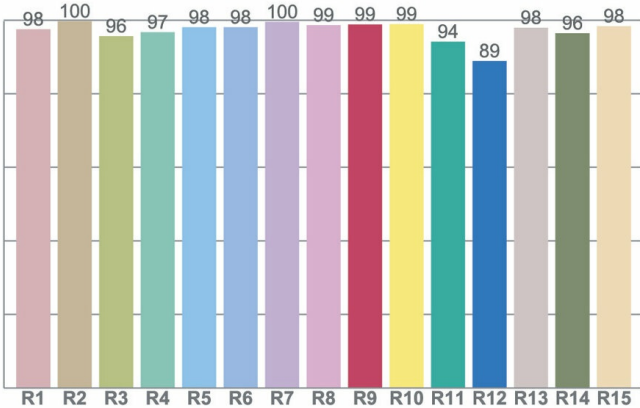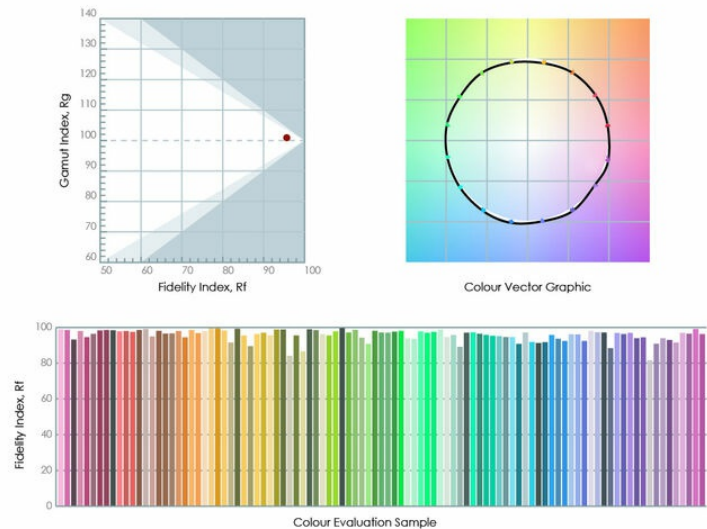

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81

