

LUCCA 30 MEDIUM BRASS 2024
ULL3TM042



LUMINAIRE REF:

PROJECT REF:



BRASS

The new Lucca 30 is an energy efficient LED miniature uplight incorporating new ProVent technology which minimises condensation and improves robustness. Built for the circular economy, the LED engine is now fully serviceable. It is ideal for creating stunning uplighting effects to columns, arches, window reveals and along walls. It comes with narrow, medium or wide beams to suit your projects. It is IP67 rated so ideal for use both inside and out. Fittings come with 1m of cable as standard. Custom cable lengths are available upon request. If using inside, the warranty increases to 5 years.

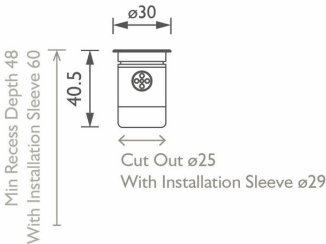

MEDIUM

ACCESSORIES



IP66 ENCLOSURE
FOR DRIVER
LARGE
ACENIPLRG



IP66 ENCLOSURE
FOR DRIVER
SMALL
ACENIPSML



LUCCA 30 TRIM
BURIAL SLEEVE
ACL3TRS2




LUCCA 30 MEDIUM BRASS 2024

ULL3TM042

LUMINAIRE REF:

PROJECT REF:

| SPECIFICATION | 350mA | 500mA | 700mA |
|---------------------------|-------|-------|-------|
| BEAM ANGLE (°) | 20° | 20° | 20° |
| LED SOURCE LUMENS (LM) | 101 | 137 | 181 |
| LUMINAIRE LUMENS (LM) | 57 | 78 | 103 |
| LUMINAIRE EFFICACY (LM/W) | 57 | 52 | 49 |
| INTENSITY RATING (CD) | 380 | 520 | 691 |
| POWER CONSUMPTION (W) | 1 | 1.5 | 2.1 |
| DRIVE CURRENT (mA) | 350 | 500 | 700 |
| FORWARD VOLTAGE (V DC) | 3 | 3 | 3 |
| MAX TEMPERATURE (°C) | 40 | 40 | 35 |
| | | | |
| | | | |

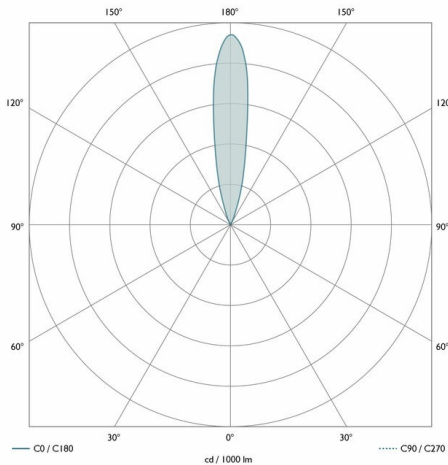

| | |
|----------------|---|
| TM66 | 2.4 (LIA Assured Verification Score) |
| INGRESS RATING | IP65 + IP67 |
| IMPACT RATING | IK08 |
| COMPLIANCE | BS EN 60598-2-13: 2006+A1: 2012+A2: 2016 BS EN IEC 60598-1:2021 BS EN 62493:2015+A1:2022 BS EN IEC 62031:2020+A11:2021 |

| | |
|--------------------------------|---------------------|
| COLOUR TEMPERATURE | 2700K |
| CIE CRI AVAILABLE AS | 98 Ra |
| IES TM-30 COLOUR FIDELITY (Rf) | 94 |
| IES TM-30 COLOUR GAMUT (Rg) | 98.4 |
| BINNING | 2 SDCM (Equivalent) |
| LIFETIME L70/B10 (HOURS) | >50000 |
| AMBIENT TEMPERATURE (Ta) | N/A |

| | |
|------------------|---|
| ELECTRICAL | |
| SOURCE TYPE | LED |
| PRODUCT CLASS | Class III (SELV low voltage) |
| DIMMING PROTOCOL | 1-10V dimmable DALI dimmable Mains dimmable (phase cut dimming) Switched |

| | |
|----------------|---------------------------------|
| OTHER DATA | |
| Cable Type | 2 Core Silicone (180°C) |
| Cable Size | 6mm OD - 2 off 24/0.2 (0.75mm2) |
| Cable Length | 1000mm |
| Connector Type | N/A |
| Weight | N/A |
| Fire rated | N/A |

