

LUCCA 30 WIDE BRONZE WITH COWL 2024  
ULL3TWG062



LUMINAIRE REF:

PROJECT REF:



BRONZE ANODISED

The new Lucca 30 is an energy efficient LED miniature uplight with a glare cowl incorporating new ProVent technology which minimises condensation and improves robustness. Built for the circular economy, the LED engine is now fully serviceable. It is ideal for creating stunning uplighting effects to columns, arches, window reveals and along walls. It comes with narrow, medium or wide beams to suit your projects. It is IP67 rated so ideal for use both inside and out. Fittings come with 1m of cable as standard. Custom cable lengths are available upon request. If using inside, the warranty increases to 5 years.

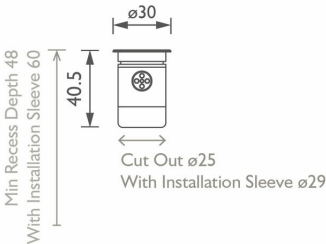

WIDE

ACCESSORIES



IP66 ENCLOSURE  
FOR DRIVER  
LARGE  
ACENIPLRG



IP66 ENCLOSURE  
FOR DRIVER  
SMALL  
ACENIPSML



LUCCA 30 TRIM  
BURIAL SLEEVE  
ACL3TRS2



WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81




LUCCA 30 WIDE BRONZE WITH COWL 2024

ULL3TWG062

LUMINAIRE REF:

PROJECT REF:

| SPECIFICATION             | 350mA | 500mA | 700mA |
|---------------------------|-------|-------|-------|
| BEAM ANGLE (°)            | 36°   | 36°   | 36°   |
| LED SOURCE LUMENS (LM)    | 101   | 137   | 181   |
| LUMINAIRE LUMENS (LM)     | 62    | 84    | 111   |
| LUMINAIRE EFFICACY (LM/W) | 62    | 56    | 53    |
| INTENSITY RATING (CD)     | 154   | 212   | 282   |
| POWER CONSUMPTION (W)     | 1     | 1.5   | 2.1   |
| DRIVE CURRENT (mA)        | 350   | 500   | 700   |
| FORWARD VOLTAGE (V DC)    | 3     | 3     | 3     |
| MAX TEMPERATURE (°C)      | 40    | 40    | 35    |
|                           |       |       |       |
|                           |       |       |       |


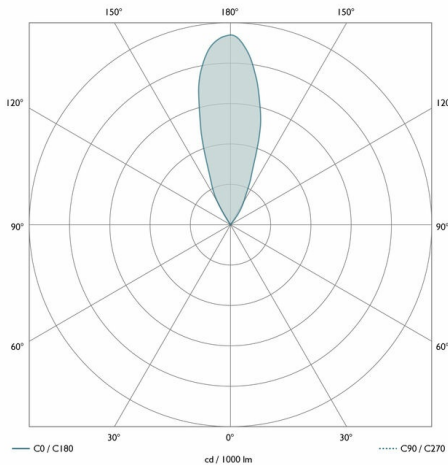


|                |   |
|----------------|---|
| TM66           | 2.4 (LIA Assured Verification Score)  |
| INGRESS RATING | IP65 + IP67   |
| IMPACT RATING  | IK08  |
| COMPLIANCE     | BS EN 60598-2-13: 2006+A1: 2012+A2: 2016<br>BS EN IEC 60598-1:2021<br>BS EN 62493:2015+A1:2022<br>BS EN IEC 62031:2020+A11:2021 |

|                                |                     |
|--------------------------------|---------------------|
| COLOUR TEMPERATURE             | 2700K               |
| CIE CRI AVAILABLE AS           | 98 Ra               |
| IES TM-30 COLOUR FIDELITY (Rf) | 93.8                |
| IES TM-30 COLOUR GAMUT (Rg)    | 98.1                |
| BINNING                        | 2 SDCM (Equivalent) |
| LIFETIME L70/B10 (HOURS)       | >50000              |
| AMBIENT TEMPERATURE (Ta)       | N/A                 |

|                  |   |
|------------------|---|
| ELECTRICAL       |   |
| SOURCE TYPE      | LED   |
| PRODUCT CLASS    | Class III (SELV low voltage)  |
| DIMMING PROTOCOL | 1-10V dimmable<br>DALI dimmable<br>Mains dimmable (phase cut dimming)<br>Switched |

|                |                                 |
|----------------|---------------------------------|
| OTHER DATA     |                                 |
| Cable Type     | 2 Core Silicone (180°C)         |
| Cable Size     | 6mm OD - 2 off 24/0.2 (0.75mm2) |
| Cable Length   | 1000mm                          |
| Connector Type | N/A                             |
| Weight         | N/A                             |
| Fire rated     | N/A                             |

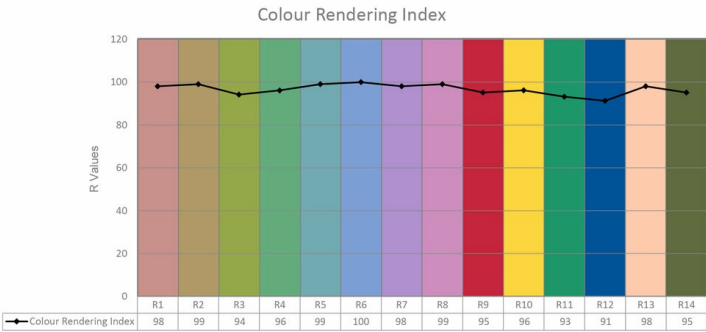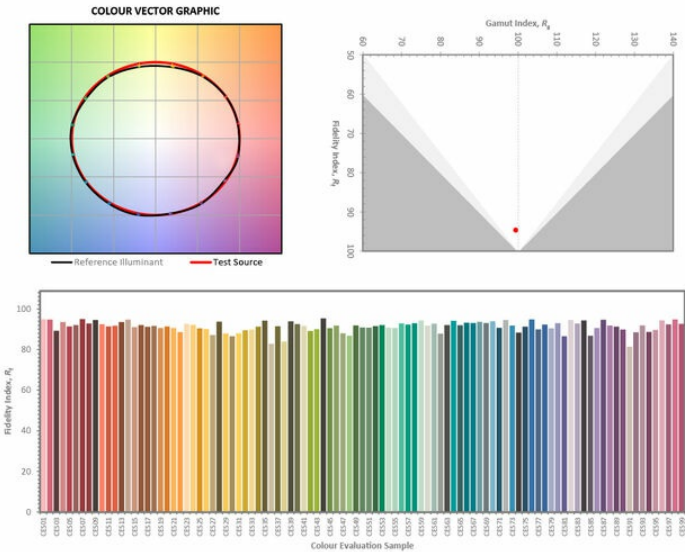

WWW.JOHN CULLEN LIGHTING.COM

UK +44 (0) 20 7371 9000 | Middle East & APAC +971 (0) 4 321 114 | Europe +33 (0)9 61 68 22 81